


ACME RECESSED

Φ57 Engine

Semi-Recessed Spotlight




Adjustable Optic



IP Rating:	IP20
Optics:	15°/24°/36°/50°
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K/3000K/3500K/2700-6000K
Typical Source Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 150mA 6W DC 36V 200mA 8W DC 36V 250mA 10W
Ambient temp:	-20 °C to 25 °C
Class:	III
Material:	Fine aluminium 6063A
Optional Accessories	Honeycomb, Elliptical Lens, Solite lens
Certifications:	CB, CE, RoHS, ERP, UKCA, GLOBAL MARK, CCC, BIS


Installation Accessories

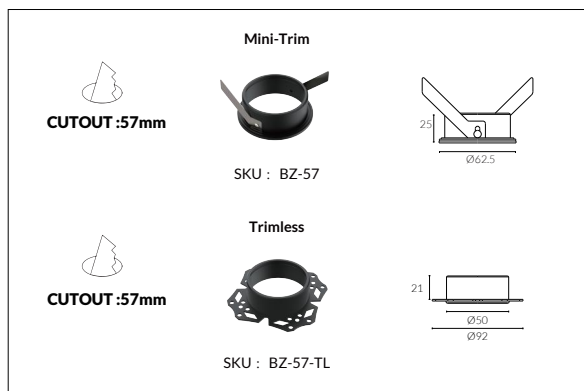

Standard




Curated Finishes (MOQ 20 applies)




10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	13172	0.14
1.0	3293	0.28
1.5	1464	0.42
2.0	823	0.56
2.5	527	0.70
3.0	366	0.84




10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	7091	0.21
1.0	1773	0.43
1.5	788	0.64
2.0	443	0.86
2.5	284	1.07
3.0	197	1.29



10W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	3820	0.31
1.0	955	0.63
1.5	424	0.94
2.0	239	1.25
2.5	153	1.57
3.0	106	1.88



10W Ra98 3000K 50°

h(m)	E(lx)	D(m)
0.5	1678	0.50
1.0	420	1.01
1.5	186	1.51
2.0	105	2.01
2.5	67	2.51
3.0	47	3.02



Code example:

AFL 57 10W-RP (-TL) - 30 N 15-B B

AFL/ adjustable

57 / 57 engine

10W / system power

RP / recessed spotlight

TL / trimless


30 / 3000K

N / non dim

15/beam angle 15°

B/ black bezel TB / trimless bezel

B/ black structure

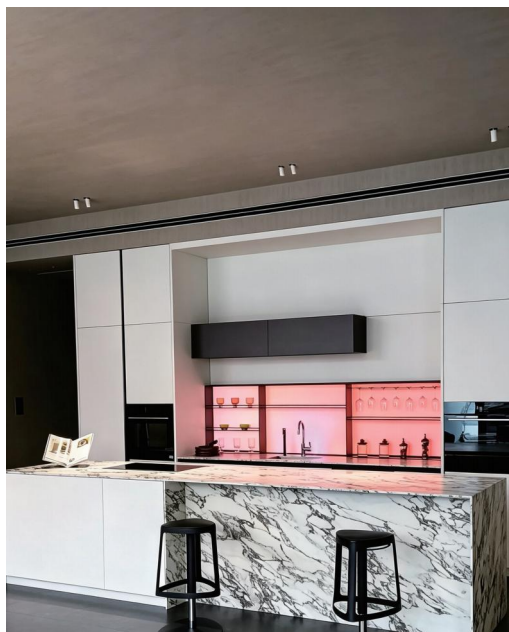

W system	lm system	optics	code
6W	450	15°	AFL5706W-RP-30N15
6W	532	24°	AFL5706W-RP-30N24
6W	523	36°	AFL5706W-RP-30N36
6W	464	50°	AFL5706W-RP-30N50



W system	lm system	optics	code
8W	582	15°	AFL5708W-RP-30N15
8W	624	24°	AFL5708W-RP-30N24
8W	661	36°	AFL5708W-RP-30N36
8W	600	50°	AFL5708W-RP-30N50



W system	lm system	optics	code
10W	704	15°	AFL5710W-RP-30N15
10W	751	24°	AFL5710W-RP-30N24
10W	814	36°	AFL5710W-RP-30N36
10W	723	50°	AFL5710W-RP-30N50