



BELLA PRO RECESSED

Φ41 Engine


Semi-Recessed Spotlight



Adjustable Optic



Installation Accessories

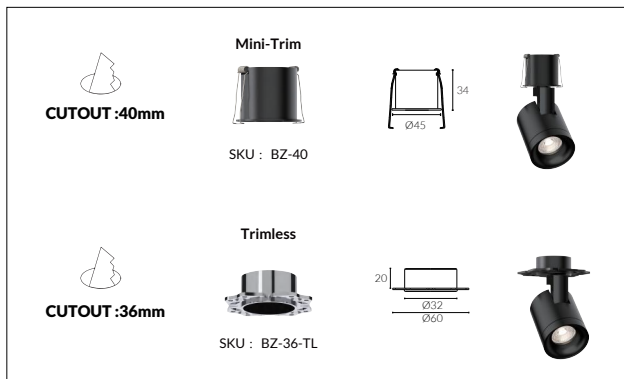


Standard



Curated Finishes (MOQ 20 applies)




IP Rating:	IP20
Optics:	15°/30°/40°/55°
UGR:	<17
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K/3000K/3500K/2700-6000K
Typical Source	
Efficacy (lm/W):	96
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 12V 350mA 6W
Ambient temp:	-20 °C to 25 °C
Class:	III
Material:	Fine aluminium 6063A
Optional Accessories	
(fixed beam):	Honeycomb, Elliptical Lens, Solite lens
Certifications:	CE




6W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	4391	0.14
1.0	1098	0.27
1.5	488	0.41
2.0	274	0.55
2.5	176	0.68
3.0	122	0.82




6W Ra98 3000K 30°

h(m)	E(lx)	D(m)
0.5	2085	0.28
1.0	521	0.55
1.5	232	0.83
2.0	130	1.10
2.5	83	1.38
3.0	58	1.65



6W Ra98 3000K 40°

h(m)	E(lx)	D(m)
0.5	1572	0.38
1.0	393	0.76
1.5	175	1.15
2.0	98	1.53
2.5	63	1.91
3.0	44	2.29



6W Ra98 3000K 55°

h(m)	E(lx)	D(m)
0.5	707	0.53
1.0	177	1.07
1.5	79	1.60
2.0	44	2.14
2.5	28	2.67
3.0	20	3.20



Code example:

RT 41 06W -30 N 15-W B

RT/ mini-trim

TL/ trimless

41 / 41 engine

06W / system power


30 / 3000K

N / non dim

15/ beam angle 15°

W/ white bezel TB/ trimless bezel

B/ black structure

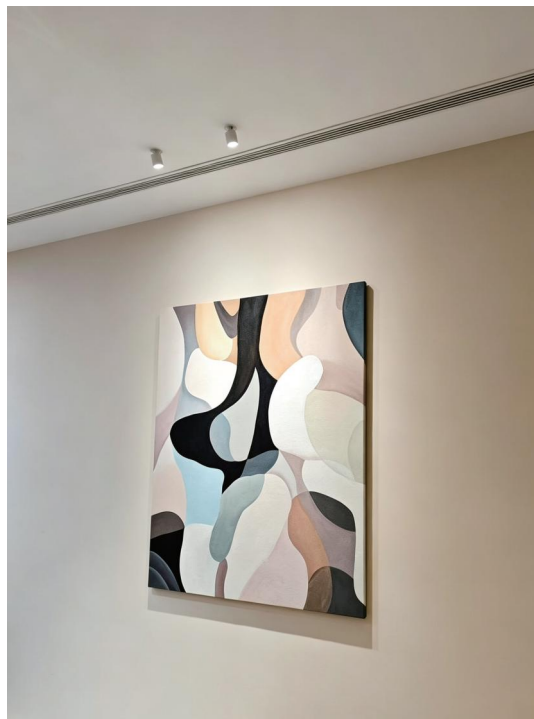

W system	lm system	optics	code
6W	267	15°	RT4106W-30N15
6W	353	30°	RT4106W-30N30
6W	430	40°	RT4106W-30N40
6W	415	55°	RT4106W-30N55



W system	lm system	optics	code
6W	267	15°	TL4106W-30N15
6W	353	30°	TL4106W-30N30
6W	430	40°	TL4106W-30N40
6W	415	55°	TL4106W-30N55