



BELLA RECESSED

Φ41 Engine


Semi-Recessed Zoomable 20°-50° Spotlight



Adjustable Optic



Installation Accessories

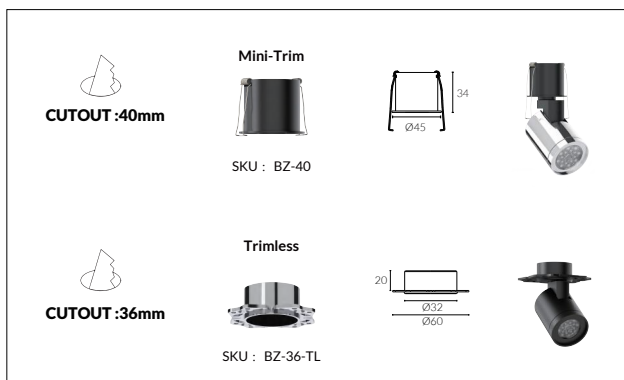


Standard



Curated Finishes (MOQ 20 applies)




IP Rating:	IP20
Optics:	Zoomable 20°-50°
UGR:	<17
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K/3000K/3500K/2700-6000K
Typical Source Efficacy (lm/W):	96
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 12V 350mA 6W
Ambient temp:	-20 °C to 25 °C
Class:	III
Material:	Fine aluminium 6063A
Certifications:	CE




6W Ra92 3000K 20°

h(m)	E(lx)	D(m)
0.5	2355	0.20
1.0	589	0.40
1.5	262	0.59
2.0	147	0.79
2.5	94	0.99
3.0	65	1.19



6W Ra92 3000K 30°

h(m)	E(lx)	D(m)
0.5	1378	0.29
1.0	344	0.58
1.5	153	0.88
2.0	86	1.17
2.5	55	1.46
3.0	38	1.75



6W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	616	0.47
1.0	154	0.95
1.5	68	1.42
2.0	38	1.90
2.5	25	2.37
3.0	17	2.85



Code example:

RT 41 06W -30 N 2050-W B

RT/ mini-trim

TL/ trimless

41/ 41 engine

06W/ system power

30/ 3000K

N/ non dim

2050/ zoomable 20°-50°

W/ white bezel TB/ trimless bezel

B/ black structure



W system	lm system	optics	code
6W	292-296	20°- 50°	RT4106W-30N2050



W system	lm system	optics	code
6W	292-296	20°- 50°	TL4106W-30N2050