


RADIANCE

162X154 Wall Sconce




Asymmetric wall-washing

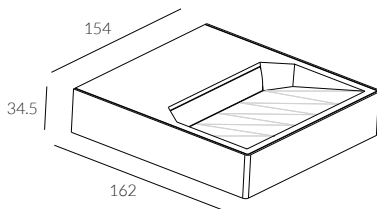

White Painted

IP Rating:	IP20
Optics:	Asymmetric wall-washing
UGR:	<10
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	3000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 600mA 25W
Ambient temp:	-20 °C to 25 °C
Class:	II





Code example:

W 162 25W - 30 N NW-W

W/ Radiance Wall Sconce

162 / Structure Length


25W / system power

30 / 3000K

N / non dim

NW/ wall wash

W/ white



W system	lm system	optics	code
25W	2263	Asymmetric	W16225W-30NW-W