



ACME 48V

Φ50 Engine 48V Pendant

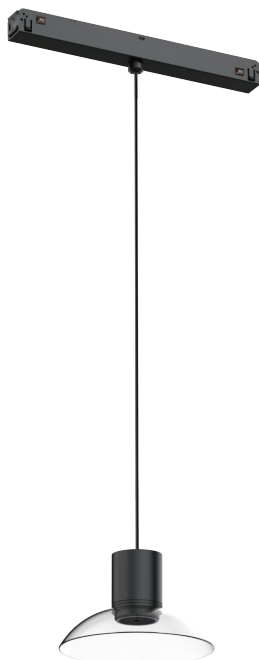

Fixed Optic

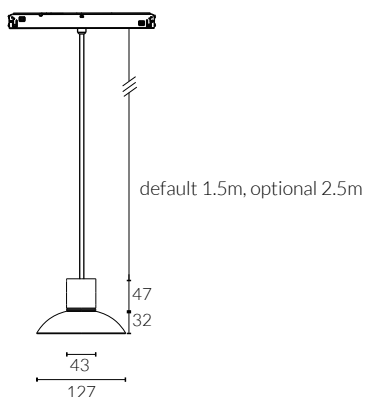

Engine




Black

Glass




Smoke Grey

IP Rating:	IP20
Optics:	15°/24°/36°
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K / 2700K-6000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 200mA 8W
Ambient temp:	-20 °C to 25 °C
Class:	III
Optional accessories:	Honeycomb, Elliptical Lens, Solite lens
Material:	Fine aluminium 6063A




8W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	7204	0.11
1.0	1801	0.22
1.5	800	0.33
2.0	450	0.43
2.5	288	0.54
3.0	200	0.65




8W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	2613	0.25
1.0	653	0.49
1.5	290	0.74
2.0	163	0.99
2.5	105	1.24
3.0	73	1.48



8W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	2005	0.34
1.0	501	0.68
1.5	223	1.03
2.0	125	1.37
2.5	80	1.71
3.0	56	2.05

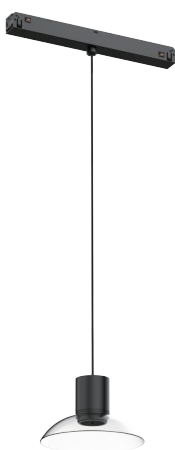

Code example:

MPW G E50 08W-30 N 15-B

MPW/ 48V mini-line pendant

G / glass

E50/ 50 engine

08W / system power

30 / 3000K

N / non dim

15 / beam angle 15°

B/ black engine



DuraGreen project:
Luxury Home



W system	lm system	optics	code
8W	336	15°	MPWGE5008W-30N15
8W	381	24°	MPWGE5008W-30N24
8W	453	36°	MPWGE5008W-30N36