


ACME ALABASTER GLOBE 48V

Φ57 Engine 48V Pendant




Standard

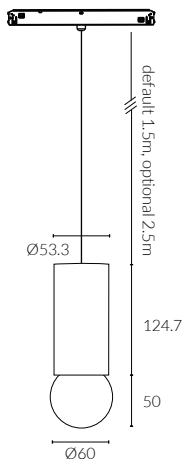

Curated Finishes (MOQ 20 applies)



IP Rating:	IP20
Optics:	120°
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 150mA 6W DC 36V 200mA 8W DC 36V 250mA 10W
Ambient temp:	-20 °C to 25 °C
Class:	III
Material:	Fine Aluminium 6063A + Alabaster Stone



h(m)	E(lx)	D(m)
0.5	52	1.20
1.0	13	2.40
1.5	6	3.60
2.0	3	4.80



Code example:

MPW E57 10W-AG -30 N 120-RC

MPW/ 48V mini-line pendant

E57/ 57 engine

10W / system power

AG / Alabaster Globe

30 / 3000K

N / non dim

120 / beam angle 120°

RC/ Regency Champagne



W system	lm system	optics	code
6W	182	120°	MPWE5706W-AG-30N120
8W	235	120°	MPWE5708W-AG-30N120
10W	286	120°	MPWE5710W-AG-30N120