



ACME ALABASTER LUNA 48V


Φ57 Engine 48V Pendant

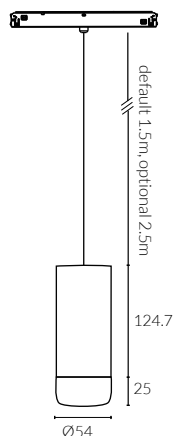


Standard



Curated Finishes (MOQ 20 applies)

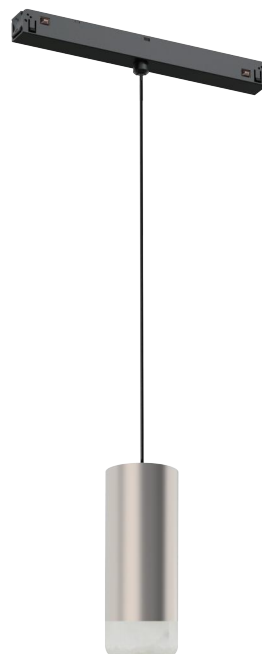

IP Rating:	IP20
Optics:	120°
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 150mA 6W DC 36V 200mA 8W DC 36V 250mA 10W
Ambient temp:	-20 °C to 25 °C
Class:	III
Material:	Fine Aluminium 6063A + Alabaster Stone



10W Ra98 3000K 120°

h(m)	E(lx)	D(m)
0.5	9	1.61
1.0	2	3.23
1.5	1	4.84



Code example:

MPW E57 10W-AL -30 N 120-RC

MPW/ 48V mini-line pendant

E57/ 57 engine

10W / system power


AL / Alabaster Luna

30 / 3000K

N / non dim

120 / beam angle 120°

RC/ Regency Champagne



W system	lm system	optics	code
6W	82	120°	MPWE5706W-AL-30N120
8W	105	120°	MPWE5708W-AL-30N120
10W	128	120°	MPWE5710W-AL-30N120