


ACME 48V

Φ57 Engine 48V Pendant




Fixed Optic

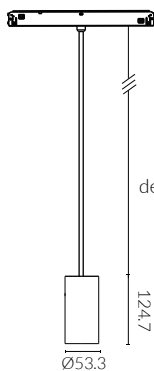

default 1.5m, optional 2.5m

124.7
Ø53.3

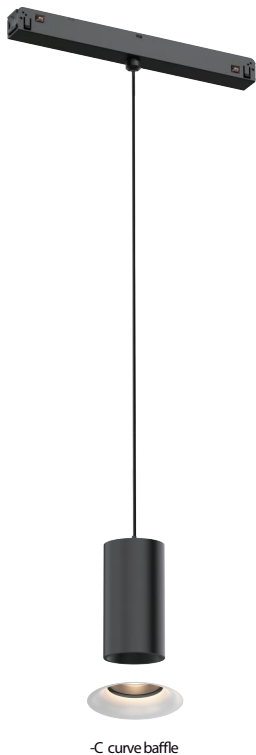

-C curve baffle

Standard



Black
Painted
9005



White
Painted
9016

Curated Finishes (MOQ 20 applies)



Bright
Chrome



Regency
Champagne



Antique
Copper




Antique
Brass




Dark
Brass

IP Rating:	IP20
Optics:	15°/24°/36°
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K / 2700K-6000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 250mA 10W
Ambient temp:	-20 °C to 25 °C
Class:	III
Optional accessories:	Honeycomb, Elliptical Lens, Solite lens
Material:	Fine aluminium 6063A




10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	10728	0.15
1.0	2682	0.31
1.5	1192	0.46
2.0	671	0.61
2.5	429	0.77
3.0	298	0.92




10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	7580	0.21
1.0	1895	0.42
1.5	842	0.63
2.0	474	0.84
2.5	303	1.04
3.0	211	1.25



10W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	4206	0.28
1.0	1051	0.57
1.5	467	0.85
2.0	263	1.14
2.5	168	1.42
3.0	117	1.71

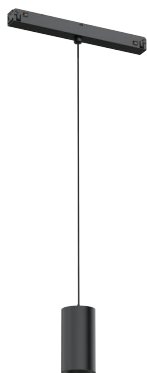

Code example:

MPW E57 10W-30 N 15-B

MPW/ 48V mini-line pendant

E57 / 57 engine


10W / system power

30 / 3000K

N / non dim

15 / beam angle 15°

B/ black structure



W system	lm system	optics	code
10W	462	15°	MPWE5710W-C-30N15
10W	628	24°	MPWE5710W-C-30N24
10W	616	36°	MPWE5710W-C-30N36