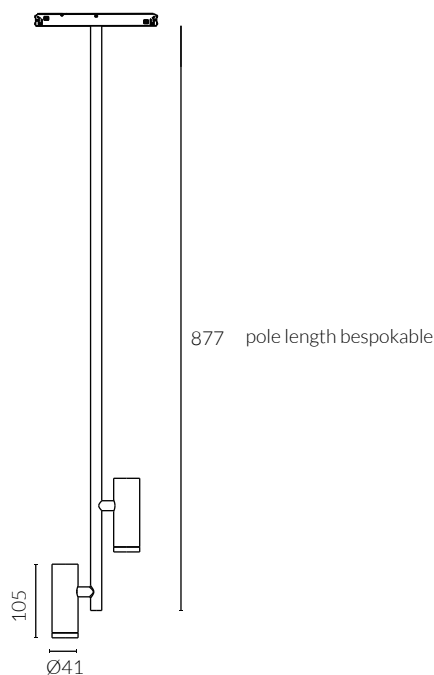


BELLA 48V




Φ41 Zoomable 20°-50° 48V Pendant



Standard



IP Rating:	IP20
Optics:	Zoomable 20°-50°
UGR:	<17
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	3000K/3500K
Typical Source	
Efficacy (lm/W):	96
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48VDC
Output:	DC 12V 350mA 6W*2
Ambient temp:	-20 °C to 25 °C
Class:	III
Material:	Fine aluminium 6063A

	h(m)	E(lx)	D(m)
 6W Ra92 3000K 20°	0.5	2355	0.20
	1.0	589	0.40
	1.5	262	0.59
	2.0	147	0.79
	2.5	94	0.99
	3.0	65	1.19
	h(m)	E(lx)	D(m)
 6W Ra92 3000K 30°	0.5	1378	0.29
	1.0	344	0.58
	1.5	153	0.88
	2.0	86	1.17
	2.5	55	1.46
	3.0	38	1.75
	h(m)	E(lx)	D(m)
 6W Ra92 3000K 50°	0.5	616	0.47
	1.0	154	0.95
	1.5	68	1.42
	2.0	38	1.90
	2.5	25	2.37
	3.0	17	2.85



Code example:

MP 2 41 06WX2-30 N 2050-DB

MP/ 48V mini-line pendant

2/ 2 spots

41/ 41 engine


06WX2 / system power

30 / 3000K

N / non dim

2050 / zoomable 20°-50°

DB/ Dark Brass structure



W system	Spots	lm system	optics	code
6W*2	2 Spot	292*2-296*2	20°- 50°	MP24106WX2-30N2050