


BELLA 48V

Φ41


Zoomable 20°-50° 48V Track Light



Adjustable Optic



minimal track



standard track

Standard



Black Painted
9005



White Painted
9016

Curated Finishes (MOQ 20 applies)



Bright
Chrome



Regency
Champagne



Antique
Copper




Antique
Brass




Dark
Brass

IP Rating:	IP20
Optics:	Zoomable 20°-50°
UGR:	<17
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K/3000K/3500K/2700-6000K
Typical Source	
Efficacy (lm/W):	96
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning:	2 Step MacAdams
Input:	48 VDC
Output:	DC 12V 350mA 6W
Ambient temp:	-20 °C to 25 °C
Class:	III
Material:	structure fine aluminum 6063A




6W Ra92 3000K 20°

h(m)	E(lx)	D(m)
0.5	2355	0.20
1.0	589	0.40
1.5	262	0.59
2.0	147	0.79
2.5	94	0.99
3.0	65	1.19



6W Ra92 3000K 30°

h(m)	E(lx)	D(m)
0.5	1378	0.29
1.0	344	0.58
1.5	153	0.88
2.0	86	1.17
2.5	55	1.46
3.0	38	1.75



6W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	616	0.47
1.0	154	0.95
1.5	68	1.42
2.0	38	1.90
2.5	25	2.37
3.0	17	2.85



Code example:

MT 41 06W -30 N 2050- B

MT/ 48V track light

41 / 41 diameter


06W / system power

30 / 3000K

N / non dim

2050 / zoomable 20°-50°

B/ black structure

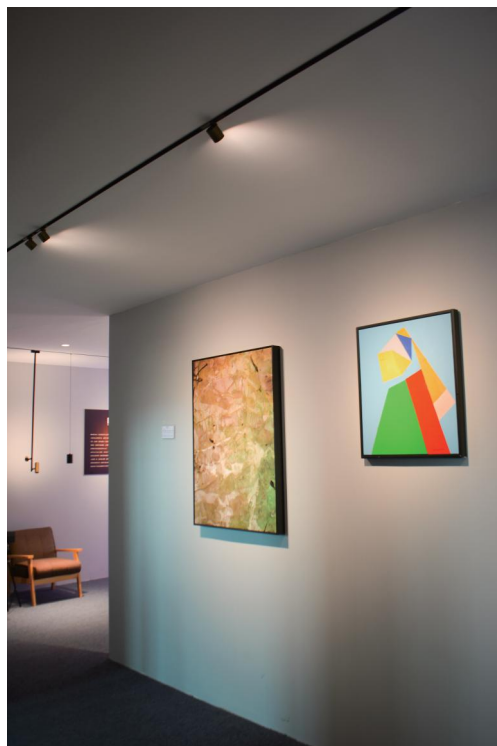

W system	lm system	optics	code
6W	292-296	20°- 50°	MT4106W-30N2050