



BELLA 48V




Φ41 Zoomable 20°-50° 48V Pendant

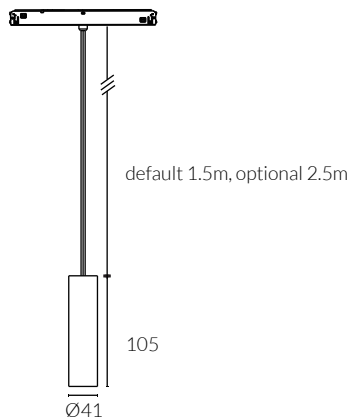


Standard

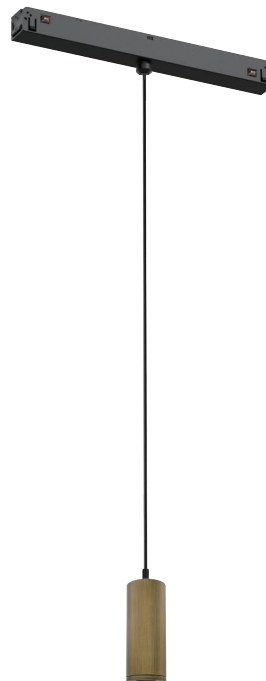

IP Rating:	IP20
Optics:	Zoomable 20°-50°
UGR:	<17
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	3000K/3500K/2700-6000K
Typical Source	
Efficacy (lm/W):	96
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning:	2 Step MacAdams
Input:	48 VDC
Output:	12V 600mA 8W
Ambient temp:	-20 °C to 25 °C
Class:	III
Material:	structure fine aluminum 6063A

	h(m)	E(lx)	D(m)
 8W Ra92 3000K 20°	0.5	2978	0.21
	1.0	745	0.42
	1.5	331	0.63
	2.0	186	0.84
	2.5	119	1.04
	3.0	83	1.25
	h(m)	E(lx)	D(m)
 8W Ra92 3000K 30°	0.5	1805	0.30
	1.0	451	0.59
	1.5	201	0.89
	2.0	113	1.18
	2.5	72	1.48
	3.0	50	1.78
	h(m)	E(lx)	D(m)
 8W Ra92 3000K 50°	0.5	795	0.49
	1.0	199	0.97
	1.5	88	1.46
	2.0	50	1.94
	2.5	32	2.43
	3.0	22	2.91

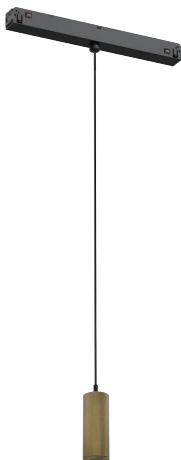

Code example:

MPW 41 08W-30 N 2050-DB

MPW/ 48V mini-line pendant

41/ 41 engine


08W / system power

30 / 3000K

N / non dim

2050 / zoomable 20°-50°

DB/ Dark Brass structure



W system	lm system	optics	code
8W	388-385	20°- 50°	MPW4108W-30N2050