


EDGE

Φ22

Outdoor Garden Spike



Adjustable Optic

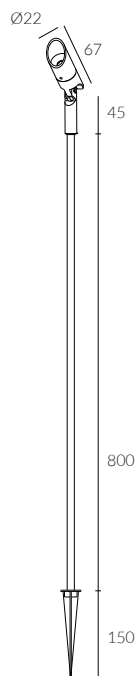

Accessories not included



24V DC-DC Constant-Current Driver

Designed to connect DuraGreen constant-current luminaires with a 3-18V forward-voltage range to a 24V DC constant-voltage supply. Available in 350mA, 500mA and 700mA versions.



Black Painted



Bespoke

IP Rating:	IP65
Optics:	14°/25°/35°
UGR:	<17
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K (3000K on request)
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 3V 700mA 2.5W
Ambient temp:	-20 °C to 45 °C
Class:	III
Plug Type:	Plug & Play (2 pin) - male
Certifications:	CE



Code example:

EG 22 03W -30 N 14- B

EG/ EDGE garden spike

22/ 22 diameter


03 / system power

30 / 3000K

N / non dim


14/ beam angle 14°

B/ Black




2.5W Ra92 3000K 14°

h(m)	E(lx)	D(m)
0.5	2760	0.13
1.0	690	0.26
1.5	307	0.38
2.0	172	0.51
2.5	110	0.64
3.0	77	0.77



2.5W Ra92 3000K 25°

h(m)	E(lx)	D(m)
0.5	923	0.22
1.0	231	0.44
1.5	103	0.67
2.0	58	0.89
2.5	37	1.10
3.0	26	1.30



2.5W Ra92 3000K 35°

h(m)	E(lx)	D(m)
0.5	834	0.34
1.0	209	0.68
1.5	93	1.00
2.0	52	1.40
2.5	33	1.70
3.0	23	2.10



W system	lm system	optics	code
3W	138	14°	EG2203W-30N14
3W	120	25°	EG2203W-30N25
3W	146	35°	EG2203W-30N35