

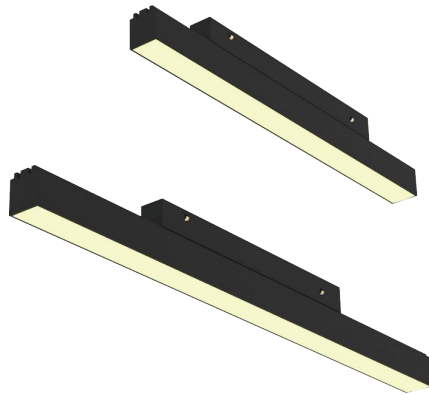


EVOLINE 48V

48V Light Stripe Fixed Version

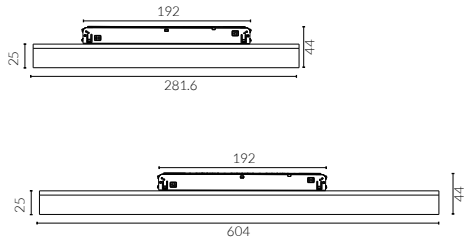


IP Rating:	IP20
Optics:	120°
UGR:	<19
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	3000K/2700K-6000K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 300mA 12W DC 36V 450mA 18W
Ambient temp:	-20 °C to 45 °C
Class:	III



Code example:

M22DF 12W-30 N 120-B
 M22DF/ 48V mini-line fixed strip
 12W / system power
 30 / 3000K
 N / non dim
 120 / beam angle 120°
 B/ black structure



W system	lm system	length	optics	code
12W	548	304	120°	M22DF12W-30N120
18W	822	604	120°	M22DF18W-30N120