


# GLAMO 48V

Φ68


Zoomable 15°-50° 48V Track Light



Adjustable Optic



minimal track



standard track



Black Painted 9005




White Painted 9016




Bespoke

- IP Rating:** IP20
- Optics:** Zoomable 15°-50°
- UGR:** <17
- CRI/RF/RG/R9:** typ. 98/95/104/97
- Lifetime:** 50,000 hrs (L90 B10)
- CCT:** 2700K / 3000K / 3500K / 4000K / 2700K-6000K
- Typical Source**
- Efficacy (lm/W):** 110
- Control:** On/off, 0/1-10V, Dali, Zigbee, Casambi
- Binning:** 2 Step MacAdams
- Input:** 48 VDC
- Output:** DC 36V 150mA 6W  
DC 36V 200mA 8W  
DC 36V 250mA 10W  
DC 36V 300mA 12W
- Ambient temp:** -20 °C to 25 °C
- Class:** III
- Material:** structure fine aluminum 6063A



12W Ra98 3000K 15°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5  | 12099 | 0.14 |
| 1.0  | 3025  | 0.27 |
| 1.5  | 1344  | 0.41 |
| 2.0  | 756   | 0.54 |
| 2.5  | 484   | 0.68 |
| 3.0  | 336   | 0.81 |



12W Ra98 3000K 40°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5  | 2174  | 0.38 |
| 1.0  | 544   | 0.76 |
| 1.5  | 242   | 1.14 |
| 2.0  | 136   | 1.52 |
| 2.5  | 87    | 1.90 |
| 3.0  | 60    | 2.28 |



**Code example:**

**MT 68 10W -30 N 1550- B**

MT/ 48V track light

68 / 68 diameter


10W / system power

30 / 3000K

N / non dim

1550 / zoomable 15°-50°

B/ black structure

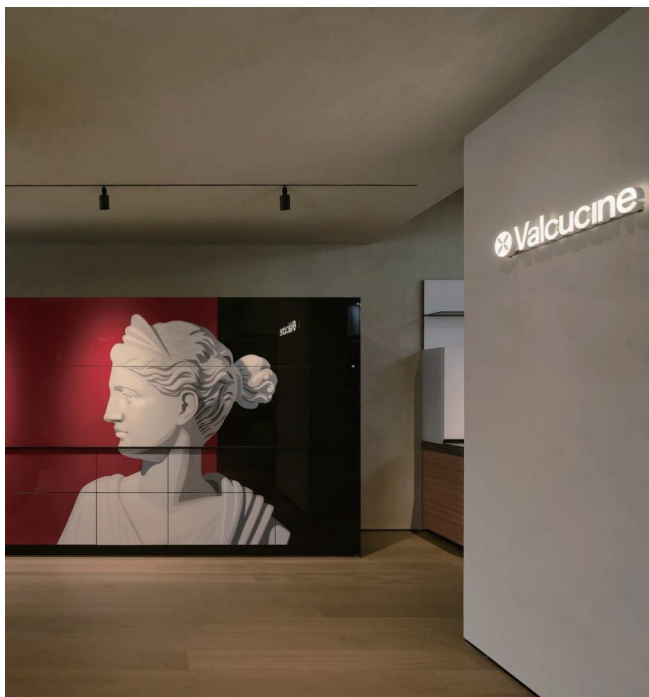

DuraGreen project:  
Valcucine Kitchen Flagship Store



| W system | lm system | optics   | code            |
|----------|-----------|----------|-----------------|
| 6W       | 437-433   | 15°- 50° | MT6806W-30N1550 |
| 8W       | 623-544   | 15°- 50° | MT6808W-30N1550 |
| 10W      | 585-589   | 15°- 50° | MT6810W-30N1550 |
| 12W      | 756-747   | 15°- 50° | MT6812W-30N1550 |