




GLAMO

Φ68

Adjustable 220-240V~ Zoomable 15°-50° Track Light

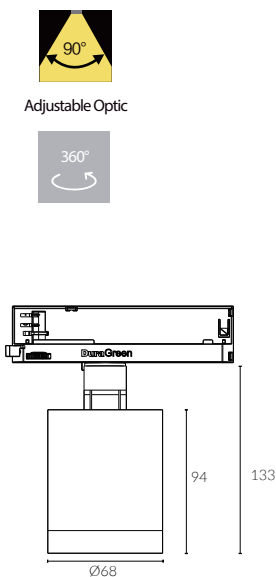


- IP Rating:** IP20
- Optics:** Zoomable 15°-50°
- UGR:** <17
- CRI/RF/RG/R9:** typ. 98/95/104/97
- Lifetime:** 50,000 hrs (L90 B10)
- CCT:** 2700K / 3000K / 3500K / 4000K
- Typical Source**
- Efficacy (lm/W):** 110
- Control:** On/off, Phase Cut, 0/1-10V, Dali, Casambi
- Binning:** 2 Step MacAdams
- Input:** AC220-240V 50/60Hz
- Output:** DC 36V 150mA 6W
DC 36V 200mA 8W
DC 36V 250mA 10W
DC 36V 300mA 12W
- Ambient temp:** -20 C to 25 C
- Class:** II
- Material:** structure fine aluminum 6063A
- Suitable Tracks:** Global, A.A.G STUCCHI, Eutrac, PowerGEAR, ERCO
- Certifications:** CE



12W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	12099	0.14
1.0	3025	0.27
1.5	1344	0.41
2.0	756	0.54
2.5	484	0.68
3.0	336	0.81



12W Ra98 3000K 40°

h(m)	E(lx)	D(m)
0.5	2174	0.38
1.0	544	0.76
1.5	242	1.14
2.0	136	1.52
2.5	87	1.90
3.0	60	2.28



Code example:

MATL 68 10W -30 N 1550- B

MATL/ 220V adjustable track light

68 / 68 engine

10W / system power

30 / 3000K

N / non dim

1550 / zoomable 15°-50°

B/ black structure



DuraGreen project:
algebraist Coffee



W system	lm system	optics	code
6 W	437-433	15°- 50°	MATL6806W-30N1550
8 W	623-544	15°- 50°	MATL6808W-30N1550
10W	585-589	15°- 50°	MATL6810W-30N1550
12W	756-747	15°- 50°	MATL6812W-30N1550