


ACME PINHOLE

Φ50 Engine Mini-Trim Fixed Round Downlight



Accessories can be ordered separately

Light Engine



SKU : EN-50

Mini-Trim





SKU : BZ-50

Pinhole Baffle



SKU : BF-50-P



Standard



Black Painted 9005



White Painted 9016

Curated Finishes (MOQ 20 applies)



Bright Chrome



Regency Champagne



Antique Copper



Antique Brass



Dark Brass

- IP Rating:

Optics:

UGR:

CRI/RF/RG/R9:

Lifetime:

CCT:

Typical Source

Efficacy (lm/W):

Control:

Binning

Input:

Output:
- IP44 front

28°/33°

<10

typ. 98/95/104/97

50,000 hrs (L90 B10)

2700K / 3000K / 3500K / 4000K / 2700K-6000K

On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi

2 Step MacAdams

AC220-240V 50/60Hz

DC 36V 150mA 6W

DC 36V 200mA 8W


-20 °C to 25 °C

III

9mm-28mm


Fine aluminium 6063A

CE



8W Ra98 3000K 28°

h(m)	E(lx)	D(m)
0.5	2921	0.25
1.0	730	0.50
1.5	325	0.75
2.0	183	1.00
2.5	117	1.25
3.0	81	1.50



8W Ra98 3000K 33°

h(m)	E(lx)	D(m)
0.5	2392	0.29
1.0	598	0.58
1.5	266	0.88
2.0	149	1.17
2.5	96	1.46
3.0	66	1.75



Code example:

MFL 50 08W -P -30 N 28-W B

MFL/ fixed

50 / cutout 50mm

08W / system power

P / pinhole


30 / 3000K

N / non dim


28 / beam angle 28°

W/ white bezel


B/ black baffle

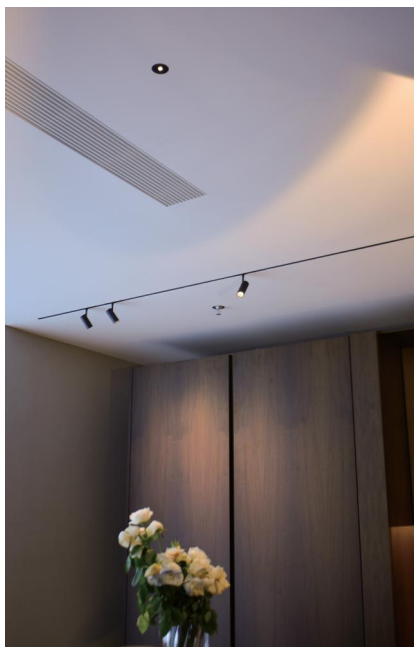

DuraGreen project:
Rimadesio Showroom



W system	lm system	optics	code
6W	258	28°	MFL5006W-P-30N28
6W	295	33°	MFL5006W-P-30N33



W system	lm system	optics	code
8W	318	28°	MFL5008W-P-30N28
8W	356	33°	MFL5008W-P-30N33