

ACME WALL-WASHER

Φ68 Engine



Trimless Wall Wash Downlight




CUTOUT :68mm



Wall Wash Optic

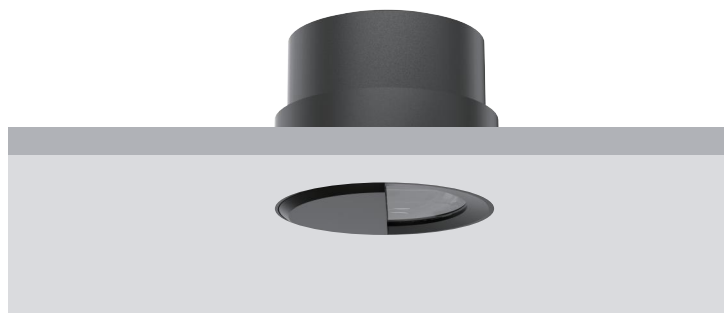

Standard



Curated Finishes (MOQ 20 applies)



IP Rating:

IP65 front

Optics:

Asymmetrical Wallwash

UGR:

<10

CRI/RF/RG/R9:

typ. 98/95/104/97

Lifetime:

50,000 hrs (L90 B10)

CCT:

2700K / 3000K / 3500K / 4000K / 2700K-6000K

Typical Source

Efficacy (lm/W):

110

Control:

On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 36V 350mA 15W

Ambient temp:

-20 °C to 25 °C

Class:


III

Material:

Fine aluminium 6063A

Certifications:

CB, CE, RoHS, ERP, UKCA, GLOBAL MARK, CCC, BIS



15W Ra98 3000K

Asymmetrical

h(m)	E(lx)	D(m)
0.5	50	0.82
1.0	12	1.64
1.5	6	2.46
2.0	3	3.27
2.5	2	4.09
3.0	1	4.91



Code example:

MFL 68 15W-TL- 30 N WS-TB B

MFL/ Fixed

68 / cutout 68mm

15W / system power

TL / trimless



30 / 3000K

N / non dim


WS / Wallwash

TB / trimless bezel

B/ black baffle

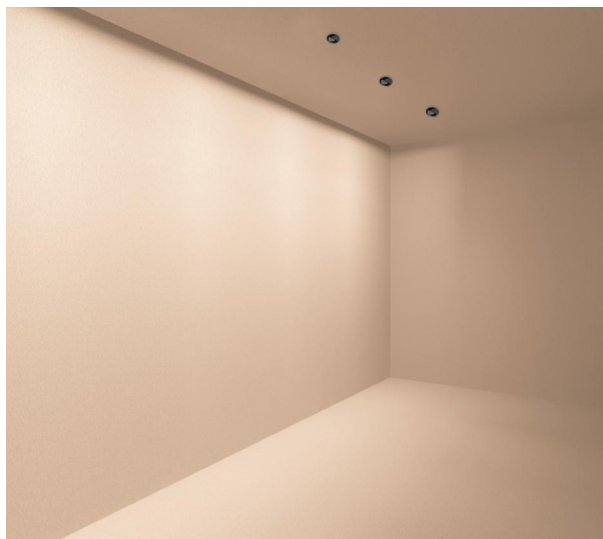

X = distance to wall
= ceiling height ÷ 3



W system	lm system	optics	code
15W	448	Asymmetrical Wallwash	MFL6815W-TL-30NWS