

ACME WALL-WASHER

Φ68 Engine


Mini-Trim Wall Wash Downlight



CUTOUT: 68mm



Wall Wash Optic



Standard



Black
Painted
9005



White
Painted
9016

Curated Finishes (MOQ 20 applies)



Bright
Chrome



Regency
Champagne



Antique
Copper



Antique
Brass



Dark
Brass

IP Rating:

IP65 front

Optics:

Asymmetrical Wallwash

UGR:

<10

CRI/RF/RG/R9:

typ. 98/95/104/97

Lifetime:

50,000 hrs (L90 B10)

CCT:

2700K / 3000K / 3500K / 4000K / 2700K-6000K

Typical Source

Efficacy (lm/W):

110

Control:

On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 36V 350mA 15W

Ambient temp:

-20 °C to 25 °C

Class:

III

Ceiling Thickness:


9mm-28mm

Material:

Fine aluminium 6063A

Certifications:

CB, CE, RoHS, ERP, UKCA, GLOBAL MARK,
CCC, BIS



15W Ra98 3000K

Asymmetrical



h(m)	E(lx)	D(m)
0.5	50	0.82
1.0	12	1.64
1.5	6	2.46
2.0	3	3.27
2.5	2	4.09
3.0	1	4.91



Code example:

MFL 68 15W-30 N WS-W B

MFL/ Fixed
 68 / cutout 68mm
 15W / system power
 30 / 3000K
 N / non dim
 WS / Wallwash
 W/ white bezel
 B/ black baffle

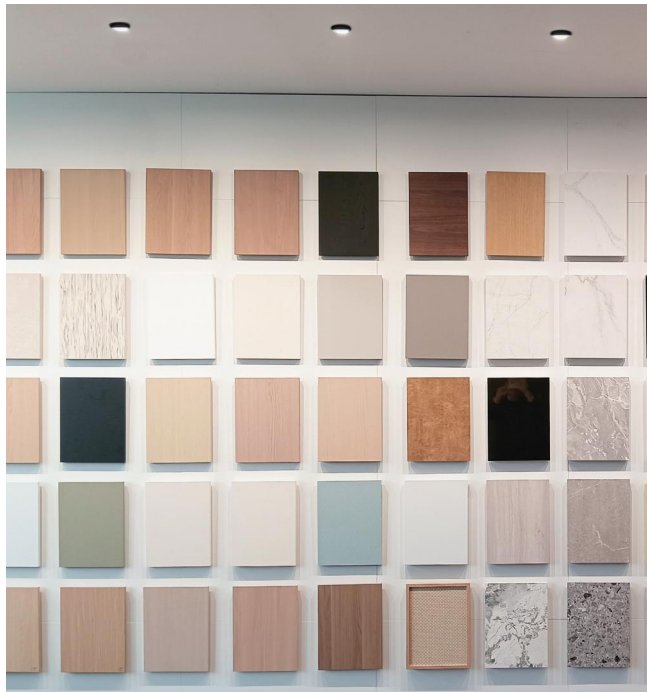

X = distance to wall
 = ceiling height ÷ 3



W system	lm system	optics	code
15W	448	Asymmetrical Wallwash	MFL6815W-30NWS