


ORBIT 48V

Φ45


Adjustable 48V Contour Spotlight



Adjustable Optic



IP Rating:	IP20
Optics:	Framing
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K / 2700K-6000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 250mA 10W
Ambient temp:	-20 °C to 25 °C
Class:	III



10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	3216	0.21
1.0	804	0.42
1.5	357	0.63
2.0	201	0.84
2.5	129	1.04
3.0	89	1.25



Code example:

M22 C45 10W -30 N F- B

M22/ 48V track light

C45 / 45 diameter


10W / system power

30 / 3000K

N / non dim

F/ Framing

B/ black structure

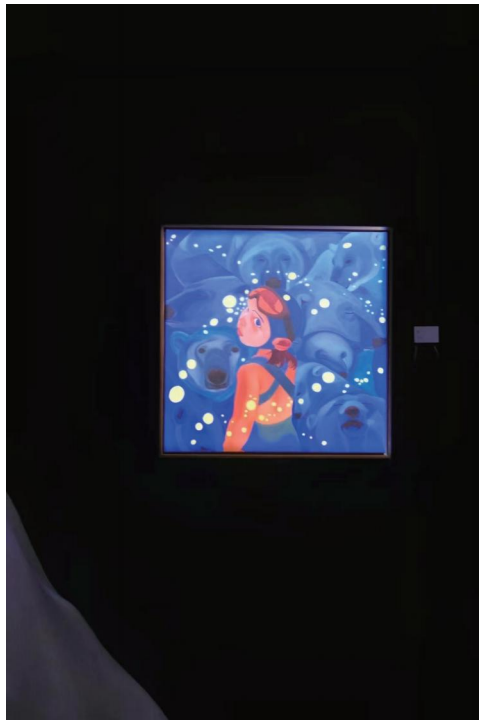

W system	lm system	code
10W	239	M22C4510W-30NF