
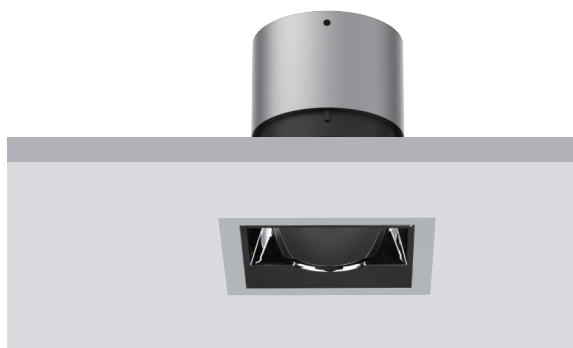


MOOD SQUARE WALL-WASHER

Ø 80*80

Mini-Trim Square Wall Wash Downlight



bezel




baffle




Recessed round wall-washer luminaire designed for creating a vertical downward beam of light

IP Rating:	IP20 and IP44 options
Optics:	Wall Wash
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K / 2700K-6000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 250mA 10W
Ambient temp:	-20 °C to 25 °C
Class:	III
Optional accessories:	Honeycomb, Elliptical Lens, Solite lens
Material:	Fine aluminium 6063A
Certifications:	CB, CE, RoHS, UKCA, GLOBAL MARK, CCC



h(m)	E(lx)
0.5	1272
1.0	318
1.5	141
2.0	80
2.5	51
3.0	35



X = distance to wall
= ceiling height ÷ 5.5



Code example:

AFQ 80 10W-30 N WS-W B

AFQ/ adjustable square

80 / cutout 80*80mm

08W / system power

30 / 3000K

N / non dim

WS / wall wash

W/ white bezel

B/ black baffle



W system	lm system	optics	code
12W	590	Wall Wash	AFQ8012W-30NWS