


ALABASTER GLOBE

Φ68 Engine

Mini-Trim Alabaster Globe Downlight

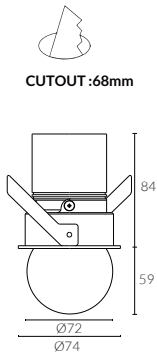

Standard




Curated Finishes (MOQ 20 applies)




Accessories can be ordered separately

Light Engine



SKU : EN-68

Mini-Trim



SKU : BZ-68

Alabaster Globe Baffle



SKU : BF-68-AG

IP Rating:	IP65 front
Optics:	120°
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CCT on request:	High efficiency 3000K / 2200K / WD 1800K - 3000K TW 1800K - 3000K / TW 1800K - 4000K

Typical Source


Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 200mA 8W DC 36V 250mA 10W DC 36V 300mA 12W

Ambient temp:	-20 °C to 25 °C
Class:	III

Ceiling Thickness: 9mm-28mm

Material: Fine Aluminium 6063A + Alabaster Stone

Certifications: CB, CE, RoHS, ERP, UKCA, GLOBAL MARK,
60-MININUT FIRE RESISTANCE,CCC,BIS



12W Ra98 3000K 120°

h(m)	E(lx)	D(m)
0.5	59	1.24
1.0	15	2.48
1.5	7	3.72
2.0	4	4.96



Code example:

AFL 68 12W-AG-30 N 120-W

AFL/ adjustable

68 / cutout 68mm

12W / system power



AG / Alabaster Globe

30 / 3000K

N / non dim

120 / beam angle 120°

W/ white bezel

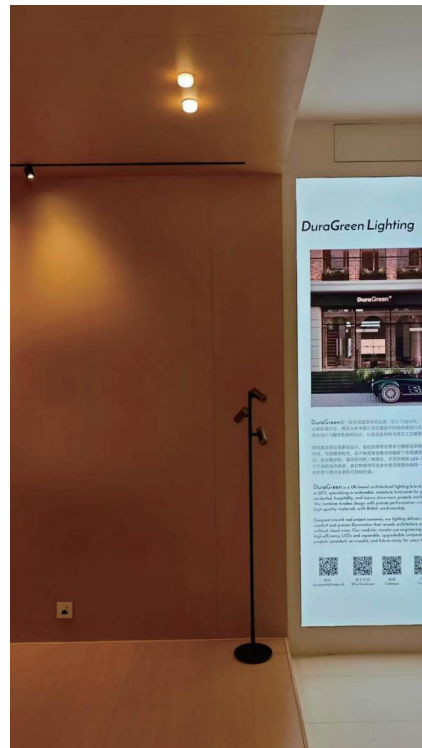

W system	lm system	optics	code
8W	235	120°	AFL6808W-AG-30N120
10W	286	120°	AFL6810W-AG-30N120
12W	337	120°	AFL6812W-AG-30N120