

MINI-LINE 11 TRACK 48V


Minimal track. Precise focus.
Quiet luxury.

DuraGreen brings its miniature architectural lighting expertise to Stucci's ultra-slim Micro 11 track system.

The range combines selected ARTFOCUS 36mm spotlights for precise directional accent lighting with Alabaster Luna and Alabaster Glow surface lights for soft, quiet-luxury ambience.



9601-S/...

Wired concealed End feed

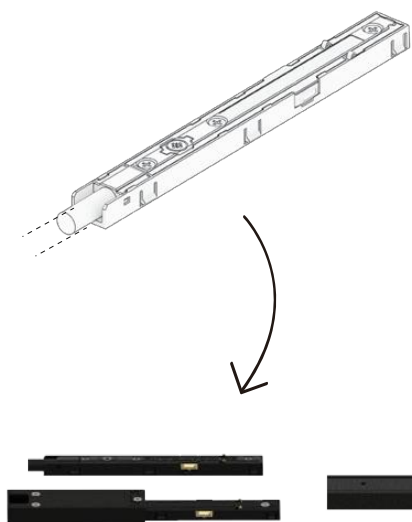

9603/...

Joining connector

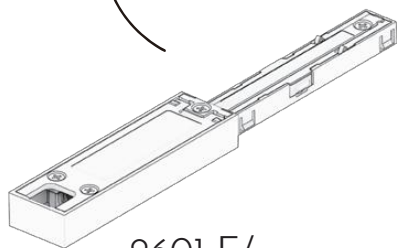

9601-E/...


External End feed



9618-S/...

Flexible joint

Slim, discreet, and easy to install, the Micro 11 system is ideal for residential, retail, hospitality, and gallery-style interiors where refined lighting and a clean ceiling detail matter.

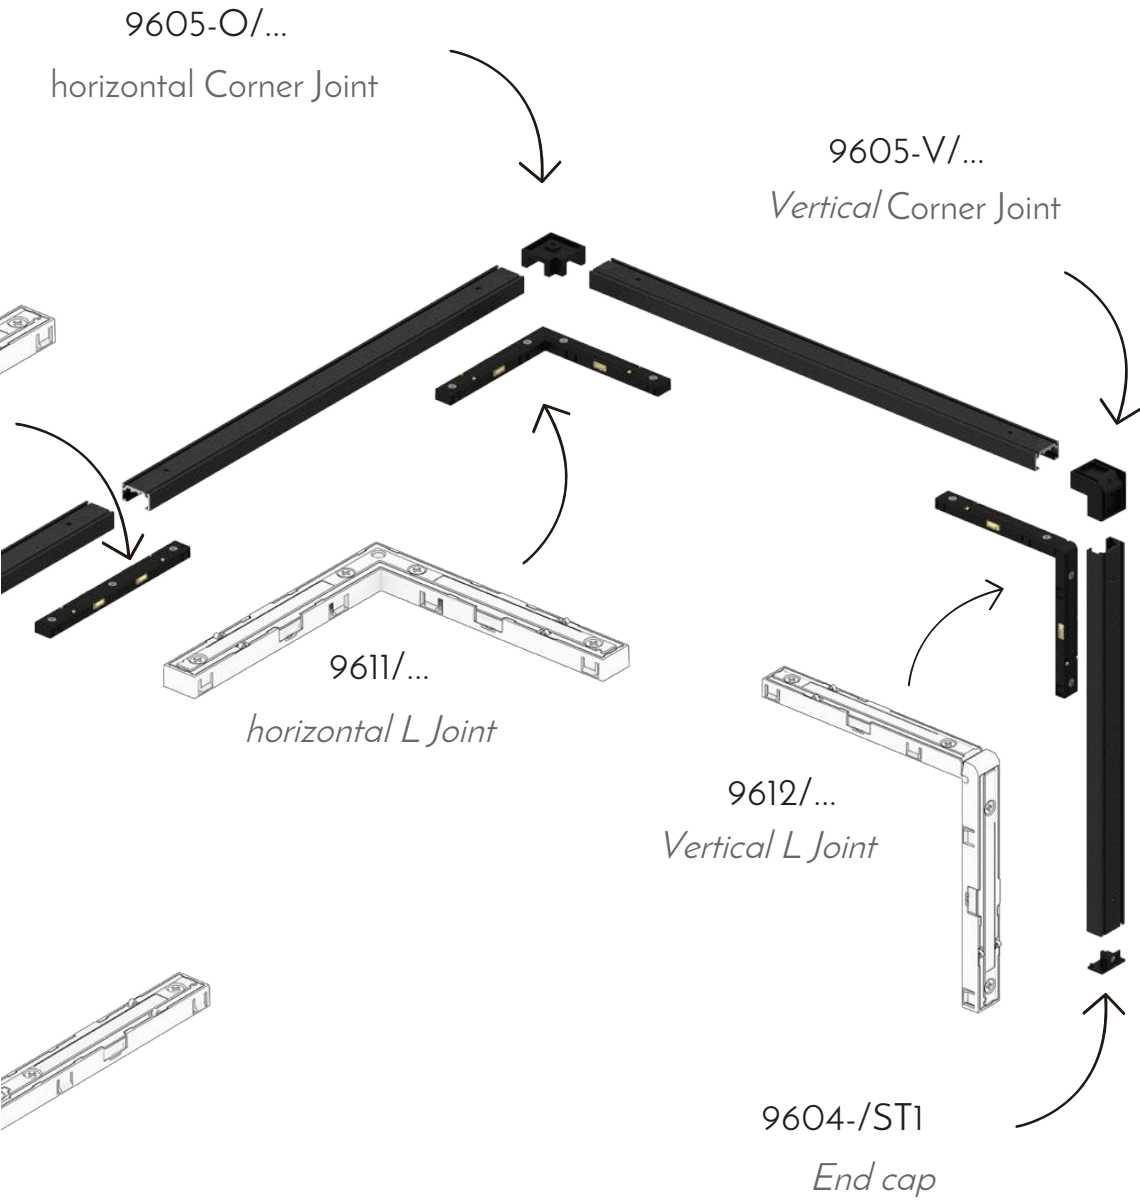



ARTFOCUS 48V

Φ36

Adjustable 48V Track Light




Adjustable Optic

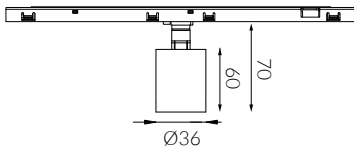

Black
Painted


White
Painted

IP Rating:	IP20
Optics:	15°/28°/36°
UGR:	< 10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K/3000K/3500K/4000K
CCT on request:	2200K / WD 1800K - 3000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Dali
Binning	2 Step MacAdams
Input :	48 VDC
Output :	DC 36V 150mA 6W
Ambient temp:	-20 °C to 25 °C
Class:	III
Material:	structure fine aluminum 6063
Optional Accessories:	Honeycomb, Elliptical Lens, Solite lens
Certifications:	CE




6W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	4937	0.14
1.0	1234	0.27
1.5	549	0.41
2.0	309	0.54
2.5	197	0.68
3.0	137	0.81



6W Ra98 3000K 28°

h(m)	E(lx)	D(m)
0.5	2848	0.25
1.0	712	0.49
1.5	316	0.74
2.0	178	0.98
2.5	114	1.23
3.0	79	1.47



6W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	1706	0.31
1.0	426	0.62
1.5	190	0.93
2.0	107	1.25
2.5	68	1.56
3.0	47	1.87



Code example:

M11 36 06W - 30 N 15 - B

M11/ MINI-LINE 11 48V

36 / 36 diameter

06W / system power

30 / 3000K

N / non dim

15/ beam angle 15°

B/ black structure



W system	lm system	optics	code
6W	373	15°	M113606W-30N15
6W	445	28°	M113606W-30N28
6W	446	36°	M113606W-30N36