

MOOD WALL-WASHER

Φ100


Mini-Trim Fixed Round Wall Wash Downlight



CUTOUT:100mm



Wall Wash optic



bezel



Black

White

baffle



Black Matt

White Matt

Silver Specular

IP Rating:

IP20 and IP44 options

Optics:

Wall Wash

UGR:

<10

CRI/RF/RG/R9:

typ. 98/95/104/97

Lifetime:

50,000 hrs (L90 B10)

CCT:

2700K / 3000K / 3500K / 4000K / 2700K-6000K

Typical Source

Efficacy (lm/W):

110

Control:

On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 36V 500mA 20W

DC 36V 600mA 25W

DC 36V 750mA 30W

Ambient temp:

-20 °C to 25 °C

Class:


III

Material:

Fine aluminium 6063A

Certifications:

CB, CE, RoHS, UKCA, GLOBAL MARK, CCC



X = distance to wall
= ceiling height ÷ 5.5



Code example:

MFL 100 30W-30 N 36-W B H

MFL/ fixed wall wash

100 / cutout 100mm

30W / system power


30 / 3000K

N / non dim

WS/ wall wash

W/ white bezel

B/ black baffle

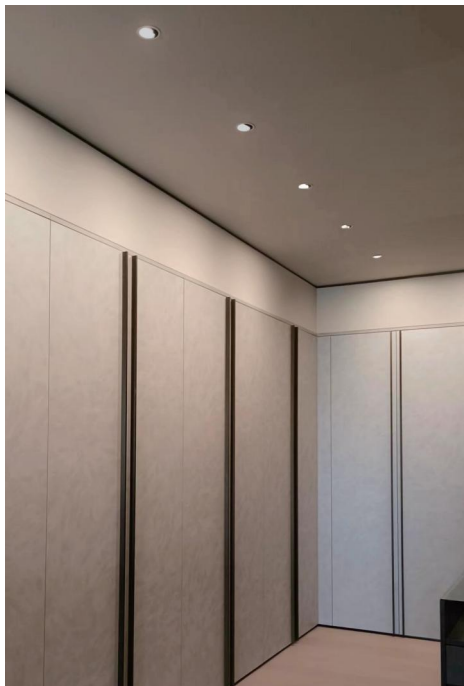

DuraGreen project:
Poliform Showroom



W system	lm system	optics	code
20W	1407	Wall Wash	MFL10020W-30NWS



W system	lm system	optics	code
25W	1777	Wall Wash	MFL10025W-30NWS



W system	lm system	optics	code
30W	2028	Wall Wash	MFL10030W-30NWS