

ACME WALL-WASHER

Φ110 Engine



Trimless Wall Wash Downlight



CUTOUT:110mm



Wall Wash Optic

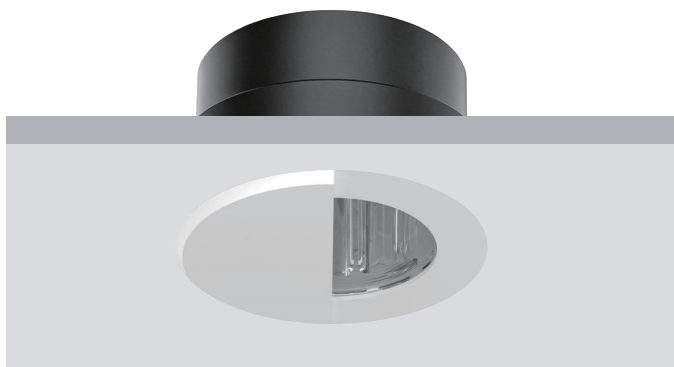


Standard



Black
Painted
9005



White
Painted
9016



X = distance to wall
= ceiling height ÷ 3

IP Rating:	IP44
Optics:	Asymmetrical Wallwash
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CCT on request:	High efficiency 3000K / 2200K / WD 1800K - 3000K TW 1800K - 3000K / TW 1800K - 4000K

Typical Source

Efficacy (lm/W): 110

Control: On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi

Binning 2 Step MacAdams

Input: AC220-240V 50/60Hz

Output: DC 36V 700mA 30W

Ambient temp: -20 °C to 25 °C

Class: III

Material: Fine aluminium 6063A

Certifications: CE,BIS



Code example:

MFL 110 30W-TL- 30 N WS-TB B

MFL/ Fixed

110 / cutout 110mm

30W / system power

TL / trimless


30 / 3000K

N / non dim

WS / Wallwash

TB / trimless bezel

B/ black baffle



W system	lm system	optics	code
30W	448	Asymmetrical Wallwash	MFL11030W-TL-30NWS