


# RADIANCE WALL

## 162X154 Wall Sconce



Asymmetric wall-washing

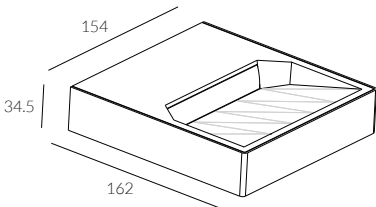


Integrated Driver



White Painted


RADIANCE Uplift brings soft, comfortable illumination to high-ceiling spaces. Its recessed asymmetric optic directs light upward from the wall, washing the ceiling with a smooth, controlled glow that enhances the sense of height while minimising glare and harsh contrast.

|                         |                                  |
|-------------------------|----------------------------------|
| <b>IP Rating:</b>       | IP20                             |
| <b>Optics:</b>          | Asymmetric wall-washing          |
| <b>UGR:</b>             | <17                              |
| <b>CRI:</b>             | 92Ra                             |
| <b>Lifetime:</b>        | 50,000 hrs (L90 B10)             |
| <b>CCT:</b>             | 3000K                            |
| <b>Typical Source</b>   |                                  |
| <b>Efficacy (lm/W):</b> | 110                              |
| <b>Control:</b>         | On/off, Phase Cut, 0/1-10V, Dali |
| <b>Binning</b>          | 2 Step MacAdams                  |
| <b>Input:</b>           | AC220-240V 50/60Hz               |
| <b>Output:</b>          | DC 36V 500mA 22W                 |
| <b>Ambient temp:</b>    | -20 °C to 25 °C                  |
| <b>Class:</b>           | III                              |



22W Ra92 3000K  
Asymmetric Uplight Distribution

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1.0  | 168.8 | 1.44 |
| 2.0  | 42.21 | 2.87 |
| 3.0  | 18.76 | 4.30 |
| 4.0  | 10.55 | 5.74 |
| 5.0  | 6.753 | 7.17 |
| 6.0  | 4.690 | 8.61 |



**Code example:**

**W 162 22W - 30 N NW-W**

W/ Radiance Wall Sconce

162 / Structure Length

22W / system power

30 / 3000K

N / non dim

NW/ wall wash

W/ white



| W system | lm system | optics     | code           |
|----------|-----------|------------|----------------|
| 22W      | 1293      | Asymmetric | W16222W-30NW-W |