ACME 68 48V

Φ68
Adjustable 48V Track Light

Adjustable Optic

-S



minimal track



standard track

Black Painted 9005

White Painted 9016

Bespoke

IP Rating:	IP20
Optics:	Wall Wash
UGR:	<10
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K/3000K/3500K/4000K
Typical Source Efficacy (lm/W):	145
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 600mA 25W
Ambient temp:	-20 ℃ to 25 ℃
Class:	III
Material:	structure fine aluminum 6063A



25W Ra92 3000K
Asymmetrical

h(m)	E(lx)	D(m)
1.0	430	0.95
2.0	107	1.90
3.0	48	2.85
4.0	27	3.80
5.0	17	4.75
6.0	12	5.70

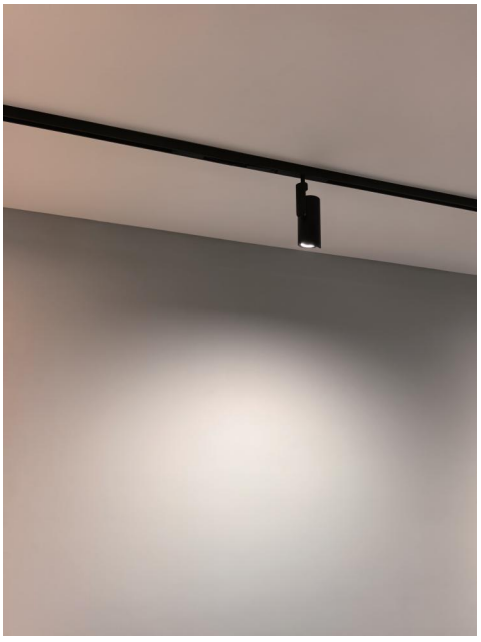

Code example:

AFL 68 15W -MT - 30 N WW-B
AFL/ adjustable
68 / 68 diameter
15W / system power
MT / 48V mini-line track light
30 / 3000K
N / non dim
WW/ wall wash
B/ black structure

W system	lm system	optics	code
25W	1203	Wall Wash	AFL6825W-MT-30NWW