




ACME 110 48V

Φ105


Adjustable 48V Track Light



Adjustable Optic

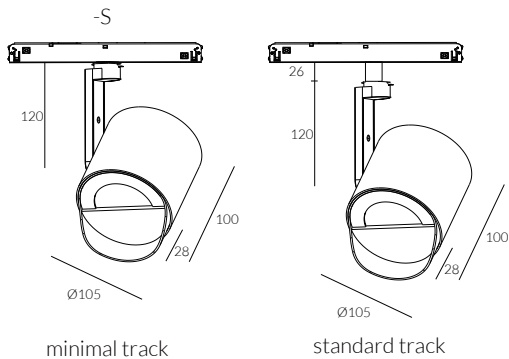

IP Rating:	IP20
Optics:	Wall Wash
UGR:	<17
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K/3000K/3500K/4000K/2700-6000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 600mA 25W
Ambient temp:	-20 °C to 25 °C
Class:	III
Optional accessories:	Honeycomb, Elliptical Lens, Solite lens
Material:	structure fine aluminum 6063A



25W Ra92 3000K
Asymmetrical

h(m)	E(lx)	D(m)
1.0	406	0.81
2.0	101	1.62
3.0	45	2.43
4.0	25	3.25
5.0	16	4.06
6.0	11	4.87



Code example:

AFL 110 25W -MT - 30 N WW-B

AFL/ adjustable
110 / 110 engine
25W / system power
MT / 48V mini-line track light
30 / 3000K
N / non dim
WW/ wall wash
B/ black structure



W system	lm system	optics	code
25W	1222	Wall Wash	AFL11025W-MT-30NWW