



EVOLINE

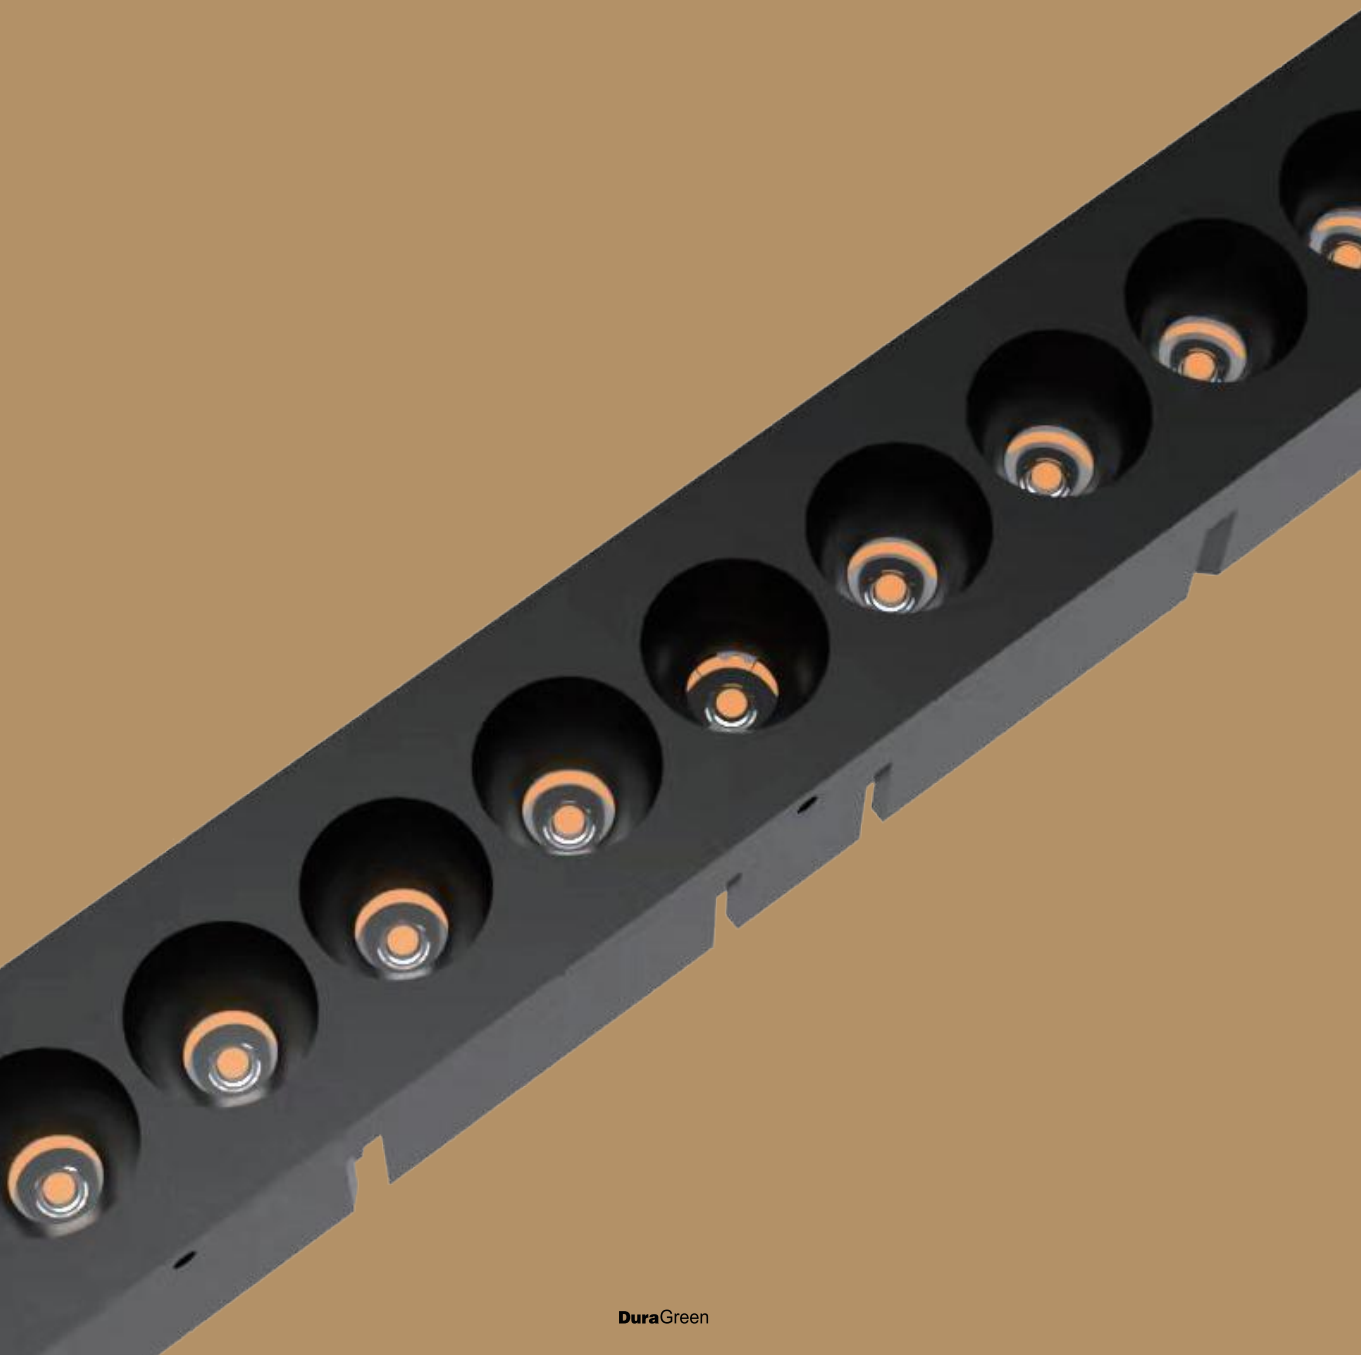

Evoline downlights embody a refined, linear approach to architectural lighting, combining ultra-slim forms with high performance and excellent visual comfort. Available in fixed, adjustable, trimmed and trimless multi-spot configurations, they allow designers to create continuous lines of light or precise accents while keeping the ceiling calm and uncluttered. With high CRI, low glare optics and multiple beam angles, Evoline is ideal for premium residential, hospitality and retail spaces where discreet fittings and clean details are essential, but quality of light and flexibility cannot be compromised.

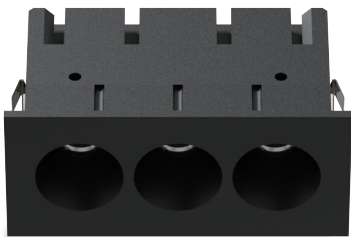

reddot winner 2023
lighting design



EVOLINE

194X25 Recessed 9 Spots Fixed Line



cutout:194X25mm



Fixed Optic



Standard



Black
Painted
9005



White
Painted
9016

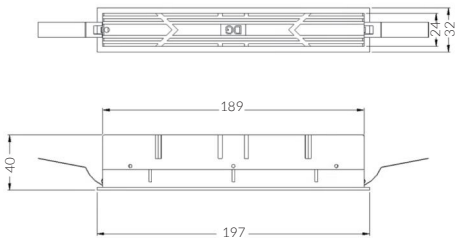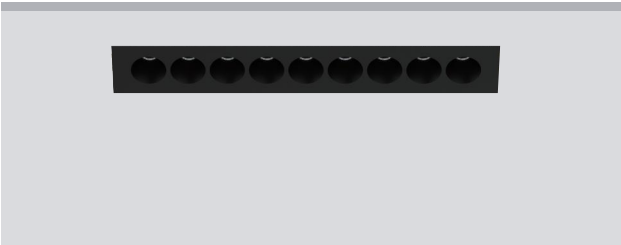


reddot winner 2023
lighting design




MUSE
DESIGN
AWARDS

IP Rating:	IP20 and IP44 options
Optics:	14°/25°/35°
UGR:	< 10
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	3000K/3500K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Phase Cut, 0/1- 10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 27V 500mA 15W DC 27V 700mA 20W
Ambient temp:	-20 C to 25 C
Class:	III
Ceiling Thickness:	5mm-28mm
Material:	Fine aluminium 6063A
Certifications:	CE, 60-MINUT FIRE RESISTANCE




20W Ra92 3000K 14°

h(m)	E(lx)	D(m)
1.5	3287	0.46
2.0	1849	0.61
4.0	462	1.25
4.5	365	1.40
6.0	205	1.87



20W Ra92 3000K 25°

h(m)	E(lx)	D(m)
1.5	1661	0.63
2.0	935	0.84
4.0	234	1.69
4.5	185	1.90
6.0	104	2.53



20W Ra92 3000K 35°

h(m)	E(lx)	D(m)
1.5	1045	0.93
2.0	588	1.24
4.0	147	2.47
4.5	116	2.78
6.0	65	3.70



Code example:

EFL09 20W-30 N 35-B

EFL/ EVOLINE fixed

09 / 9 spots


20W / system power

30 / 3000K

N / non dim

35 / beam angle 35°

B/ black

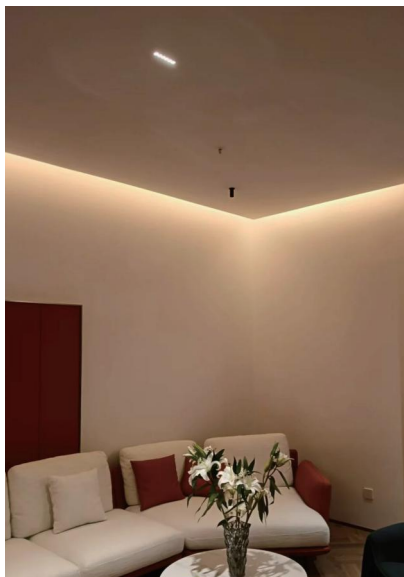

W system	lm system	optics	code
15W	1032	14°	EFL0915W-30N14
15W	956	25°	EFL0915W-30N25
15W	937	35°	EFL0915W-30N35



W system	lm system	optics	code
20W	1439	14°	EFL0920W-30N14
20W	1264	25°	EFL0920W-30N25
20W	1263	35°	EFL0920W-30N35