



EVOLINE

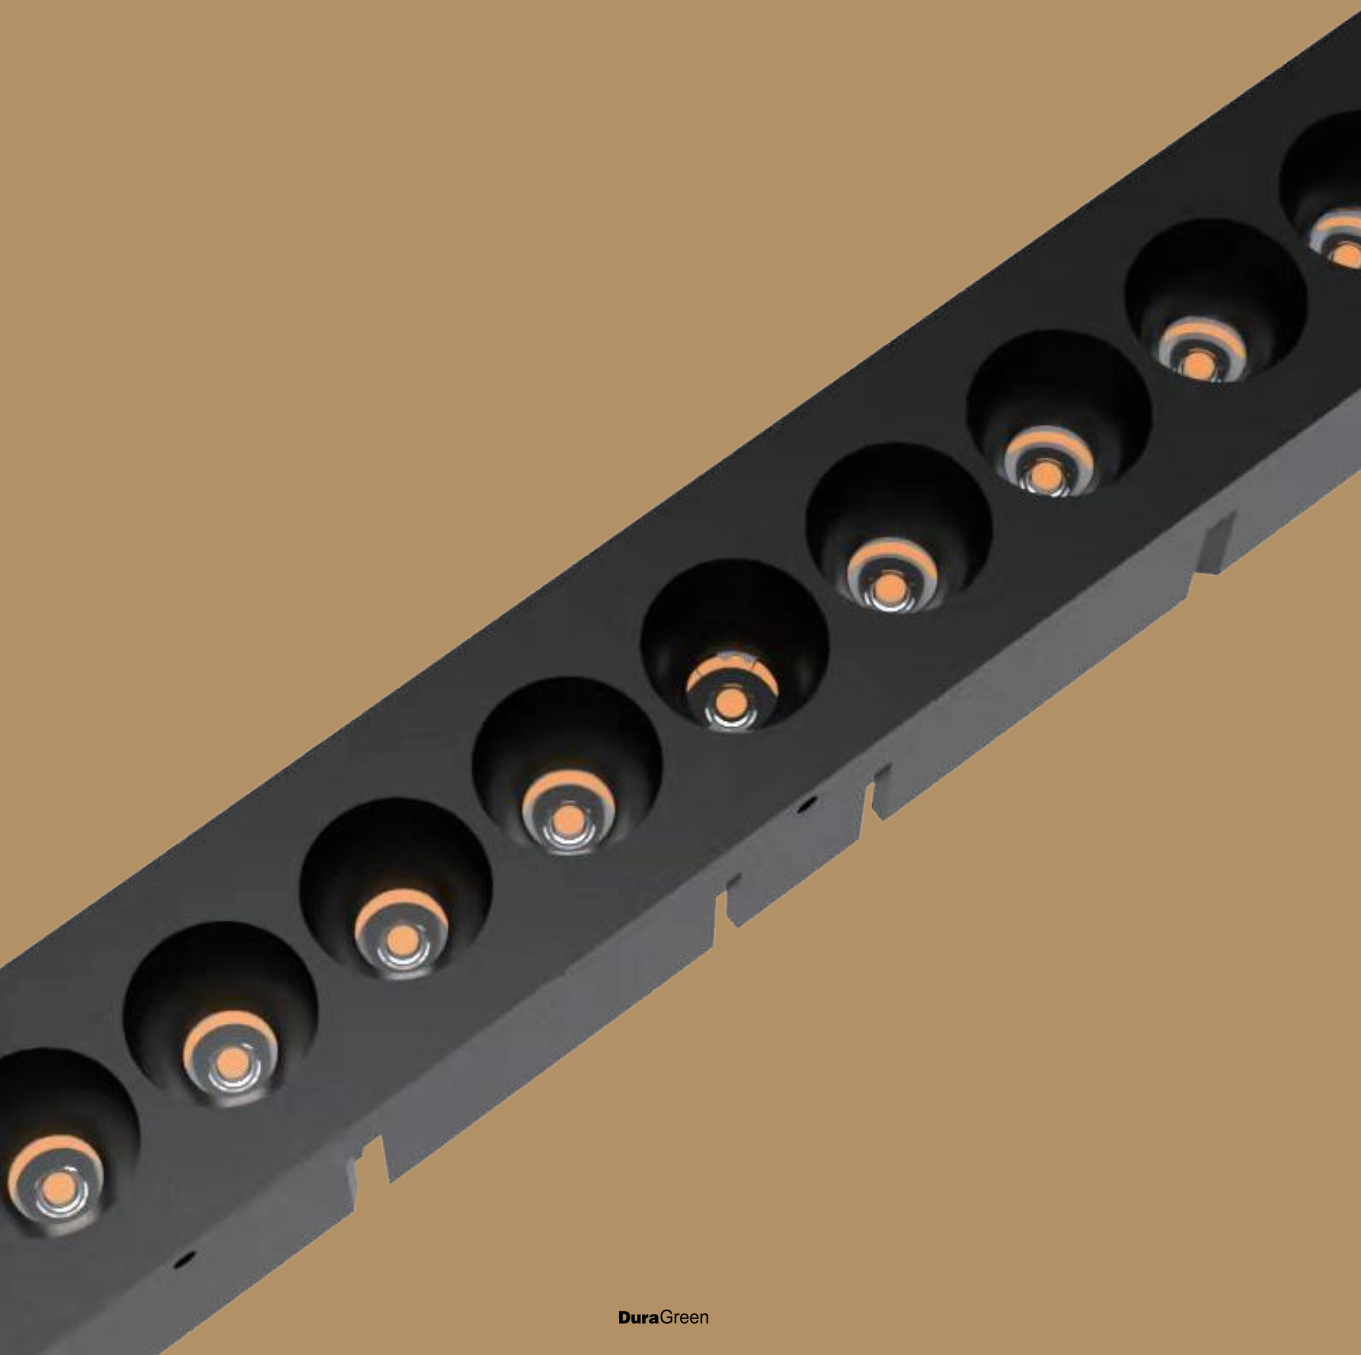

Evoline downlights embody a refined, linear approach to architectural lighting, combining ultra-slim forms with high performance and excellent visual comfort. Available in fixed, adjustable, trimmed and trimless multi-spot configurations, they allow designers to create continuous lines of light or precise accents while keeping the ceiling calm and uncluttered. With high CRI, low glare optics and multiple beam angles, Evoline is ideal for premium residential, hospitality and retail spaces where discreet fittings and clean details are essential, but quality of light and flexibility cannot be compromised.

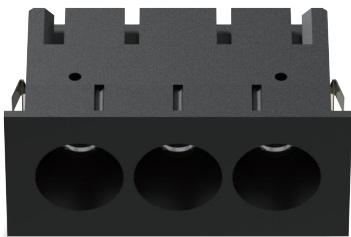

reddot winner 2023  
lighting design



# EVOLINE

## 74X32 Recessed 3 Spots Trimless Line



CUTOUT: 74x32mm



Fixed Optic



### Standard



Black  
Painted  
9005



White  
Painted  
9016

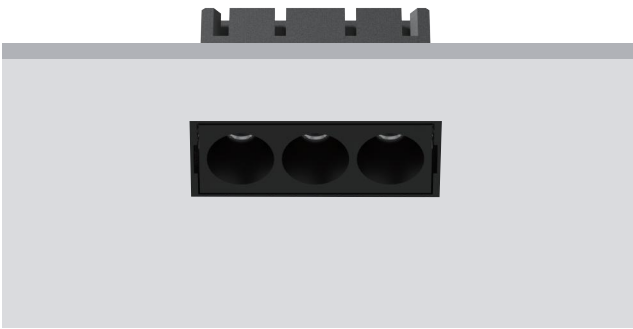


reddot winner 2023  
lighting design




MUSE  
DESIGN  
AWARDS

|                         |                                                   |
|-------------------------|---------------------------------------------------|
| <b>IP Rating:</b>       | IP20 and IP44 options                             |
| <b>Optics:</b>          | 14°/25°/35°                                       |
| <b>UGR:</b>             | <10                                               |
| <b>CRI:</b>             | 92Ra                                              |
| <b>Lifetime:</b>        | 50,000 hrs (L90 B10)                              |
| <b>CCT:</b>             | 3000K/3500K                                       |
| <b>Typical Source</b>   |                                                   |
| <b>Efficacy (lm/W):</b> | 113                                               |
| <b>Control:</b>         | On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi |
| <b>Binning</b>          | 2 Step MacAdams                                   |
| <b>Input:</b>           | AC220-240V 50/60Hz                                |
| <b>Output:</b>          | DC 9V 500mA 6W<br>DC 9V 700mA 8W                  |
| <b>Ambient temp:</b>    | -20 °C to 25 °C                                   |
| <b>Class:</b>           | III                                               |
| <b>Material:</b>        | Fine aluminium 6063A                              |
| <b>Certifications:</b>  | CE                                                |




8W Ra92 3000K 14°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5  | 8118  | 0.15 |
| 1.0  | 2030  | 0.30 |
| 1.5  | 902   | 0.45 |
| 2.0  | 507   | 0.60 |
| 2.5  | 325   | 0.76 |
| 3.0  | 226   | 0.91 |




8W Ra92 3000K 25°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5  | 4251  | 0.23 |
| 1.0  | 1063  | 0.47 |
| 1.5  | 472   | 0.70 |
| 2.0  | 266   | 0.93 |
| 2.5  | 170   | 1.16 |
| 3.0  | 118   | 1.40 |



8W Ra92 3000K 35°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5  | 2721  | 0.32 |
| 1.0  | 680   | 0.63 |
| 1.5  | 302   | 0.95 |
| 2.0  | 170   | 1.26 |
| 2.5  | 109   | 1.58 |
| 3.0  | 76    | 1.89 |



### Code example:

#### **ETL 03 08W-30 N 35-B**

EFL/ EVOLINE trimless

03 / 3 spots

08W / system power

30 / 3000K

N / non dim

35 / beam angle 35°

B/ black



DuraGreen project:  
Guangzhou Private Club



| W system | lm system | optics | code           |
|----------|-----------|--------|----------------|
| 6W       | 531       | 14°    | ETL0306W-30N14 |
| 6W       | 413       | 25°    | ETL0306W-30N25 |
| 6W       | 447       | 35°    | ETL0306W-30N35 |



| W system | lm system | optics | code           |
|----------|-----------|--------|----------------|
| 8W       | 620       | 14°    | ETL0308W-30N14 |
| 8W       | 502       | 25°    | ETL0308W-30N25 |
| 8W       | 558       | 35°    | ETL0308W-30N35 |