


FOCUS

Φ65 Outdoor Projector



Adjustable Optic



Black Painted



Bespoke

IP Rating:	IP66
Optics:	15°/24°/36°/50°
UGR:	<19
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K, 3000K (2400K, 3500K, 4000K on request)
Typical Source	
Efficacy (lm/W):	140
Control:	On/off
Binning	2 Step MacAdams
Output:	DC 18V 500mA 10W, 700mA 15W
Ambient temp:	-20 °C to 45 °C
Class:	III
Plug Type:	Plug & Play (2 pin) - male
Certifications:	CE

Accessories not included

Ground Stake




Code: ODG-1

Dimensions: Ø38mm*H160mm

24V DC-DC Constant-Current Driver



Designed to connect DuraGreen constant-current luminaires with a **3-18V forward-voltage range** to a **24V DC constant-voltage supply**. Available in 350mA, 500mA and 700mA versions.

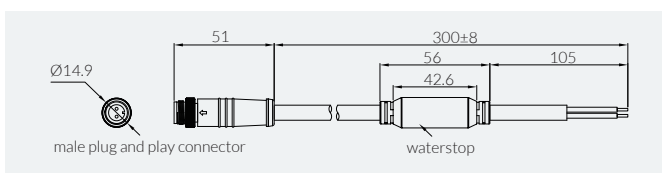



Code example:

SF 65 10W- 27 N 15- (24) - B

SF/ FOCUS projector

65 / 65 diameter

10W / system power


27 / 2700K

N / non dim

15 / beam angle 15°


24 / 24VDC

B/ black structure




15W Ra92 3000K 15°

h(m)	E(lx)	D(m)
0.5	19856	0.12
1.0	4964	0.23
1.5	2206	0.35
2.0	1241	0.46
2.5	794	0.58
3.0	552	0.69




15W Ra92 3000K 24°

h(m)	E(lx)	D(m)
0.5	9636	0.20
1.0	2409	0.41
1.5	1071	0.61
2.0	602	0.81
2.5	385	1.02
3.0	268	1.22



15W Ra92 3000K 36°

h(m)	E(lx)	D(m)
0.5	5780	0.30
1.0	1445	0.60
1.5	642	0.89
2.0	361	1.19
2.5	231	1.49
3.0	161	1.79



15W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	2268	0.46
1.0	567	0.92
1.5	252	1.37
2.0	142	1.83
2.5	91	2.29
3.0	63	2.75

24VDC Verison



W system	Voltage	lm system	optics	code
10W	24VDC	749	15°	SF6510W-27N15-24
10W	24VDC	849	24°	SF6510W-27N24-24
10W	24VDC	834	36°	SF6510W-27N36-24
10W	24VDC	811	50°	SF6510W-27N50-24

AC 220-240V Verison



W system	Input	lm system	optics	code
10W	AC220-240V	749	15°	SF6510W-27N15
10W	AC220-240V	849	24°	SF6510W-27N24
10W	AC220-240V	834	36°	SF6510W-27N36
10W	AC220-240V	811	50°	SF6510W-27N50



W system	Input	lm system	optics	code
15W	AC220-240V	984	15°	SF6515W-27N15
15W	AC220-240V	1124	24°	SF6515W-27N24
15W	AC220-240V	1086	36°	SF6515W-27N36
15W	AC220-240V	1055	50°	SF6515W-27N50