


BELLA

Φ50

Outdoor Projector Zoomable 20°-50°



Adjustable Optic



Black Painted



Bespoke



Solid Brass



Accessories not included

Ground Stake



24V DC-DC Constant-Current Driver




Code: ODG-1

Dimensions: Ø38mm*H160mm

Designed to connect DuraGreen constant-current luminaires with a 3-18V forward-voltage range to a 24V DC constant-voltage supply. Available in 350mA, 500mA and 700mA versions.

IP Rating:	IP65
Optics:	Zoomable 20°-50°
UGR:	<19
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K, 3000K (2400K, 3500K, 4000K on request)
Typical Source Efficacy (lm/W):	140
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Output:	DC 18V 350mA 7W
Ambient temp:	-20 °C to 45 °C
Class:	III
Plug Type:	Plug & Play (2 pin) - male
Certifications:	CE

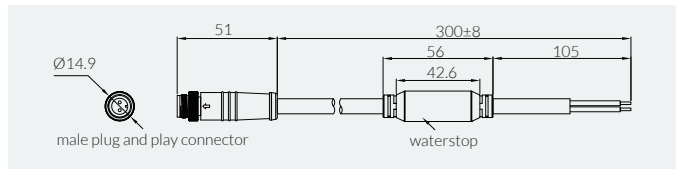



Code example:

SFO 50 07W -30 N 2050 - (24) - SB

SFO/ BELLA outdoor projector

50 / 50 diameter

07W / system power


30 / 3000K

N / non dim

2050 / Zoomable 20°-50°


24 / 24VDC

SB/ solid brass structure



6W Ra92 3000K 20°

h(m)	E(lx)	D(m)
0.5	3056	0.21
1.0	764	0.41
1.5	340	0.62
2.0	191	0.83
2.5	122	1.04
3.0	85	1.24



6W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	948	0.44
1.0	237	0.87
1.5	105	1.31
2.0	59	1.75
2.5	38	2.18
3.0	26	2.62

24VDC Verison



W system	Voltage	lm system	optics	code
7W	24VDC	445-436	20°- 50°	SFO5007W-27N2050-24

AC 220-240V Verison



W system	Input	lm system	optics	code
7W	AC220-240V	445-436	20°- 50°	SFO5007W-27N2050