

FOCUS


Φ32 Outdoor Uplights



CUTOUT :32mm



Fixed Optic



Bezel



Machined 316 Steel



Bespoke

glare shield 50%




Accessories not included



24V DC-DC Constant-Current Driver

Designed to connect DuraGreen constant-current luminaires with a 3-18V forward-voltage range to a 24V DC constant-voltage supply. Available in 350mA, 500mA and 700mA versions.

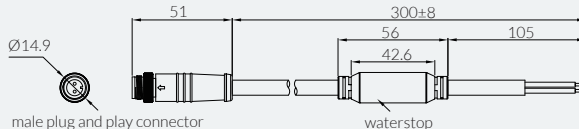

IP Rating:	IP67
Optics:	10°/20°/30°
UGR:	< 19
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K (3000K on request)
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Output:	DC 3V 700mA 2.5W
Ambient temp:	-20 °C to 45 °C
Class:	III
Plug Type:	Plug & Play (2 pin) - male
Certifications:	CE



Code example:

UL 32 2.5W- 27 N 10- (24)- SUS

UL/ uplight

32 / cutout 32mm

2.5W / system power


27 / 2700K

N / non dim

10 / beam angle 10°


24 / 24VDC

SUS/ Machined 316 Steel




2.5W Ra92 3000K 10°

h(m)	E(lx)	D(m)
0.5	4115	0.09
1.0	1029	0.28
1.5	457	0.27
2.0	257	0.36
2.5	165	0.46
3.0	114	0.55



2.5W Ra92 3000K 20°


h(m)	E(lx)	D(m)
0.5	1155	0.20
1.0	289	0.41
1.5	128	0.61
2.0	72	0.81
2.5	46	1.02
3.0	32	1.22



2.5W Ra92 3000K 30°


h(m)	E(lx)	D(m)
0.5	776	0.29
1.0	194	0.58
1.5	86	0.88
2.0	48	1.17
2.5	31	1.46
3.0	22	1.75

24VDC Verison



W system	Voltage	lm system	optics	code
2.5W	24VDC	123	10°	UL322.5W-27N10-24
2.5W	24VDC	94	20°	UL322.5W-27N20-24
2.5W	24VDC	124	30°	UL322.5W-27N30-24

AC 220-240V Verison



W system	Input	lm system	optics	code
2.5W	AC220-240V	123	10°	UL322.5W-27N10
2.5W	AC220-240V	94	20°	UL322.5W-27N20
2.5W	AC220-240V	124	30°	UL322.5W-27N30