

CAPRI PENDANT


Ø114
Surface Pendant

Fixed Optic

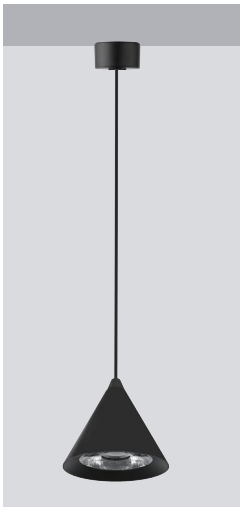

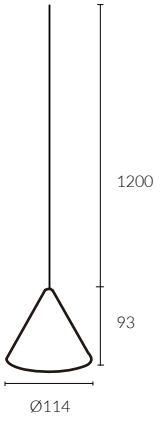

Installation Accessories

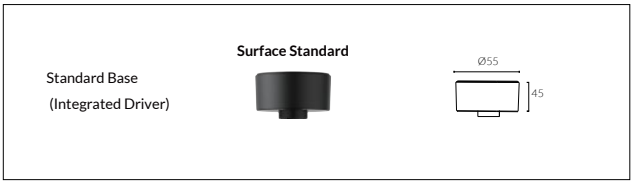

White Painted

Black Painted




Bespoke

IP Rating:	IP20
Optics:	10°/24°/36°/55°
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K
Typical Source Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali
Binning	2 Step MacAdams
Driver Input:	AC220-240V 50/60Hz
Electrical (System W):	DC 36V 150mA 6W DC 36V 200mA 8W
Ambient temp:	-20 ˚C to 25 ˚C
Class:	III
Material:	Fine aluminium 6063A




Code example:

PJST 114 08W - 30 N 24-B
PJRT/ CAPRI surface pendant
114 / 114 diameter
08W / system power
30 / 3000K
N / non dim
24/ beam angle 24°
B/ black structure



W system	lm system	optics	code
6W	376	10°	PJST11406W-30N10
6W	597	24°	PJST11406W-30N24
6W	590	36°	PJST11406W-30N36
6W	545	55°	PJST11406W-30N55



W system	lm system	optics	code
8W	445	10°	PJST11408W-30N10
8W	738	24°	PJST11408W-30N24
8W	736	36°	PJST11408W-30N36
8W	672	55°	PJST11408W-30N55