ORBIT CONTOUR

Ø23
Recessed Contour Spotlight



Adjustable Optic







Black Painted

Installation Accessories

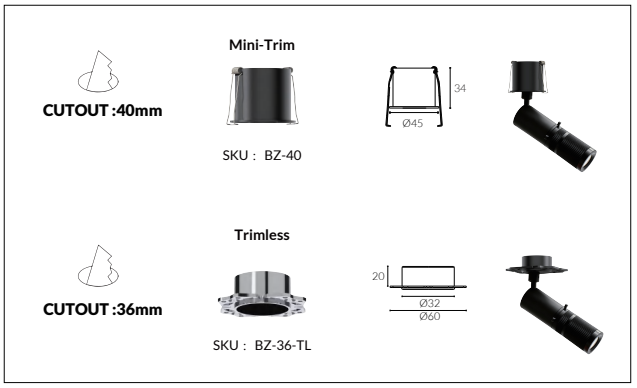

IP Rating:	IP20
Optics:	Framing
UGR:	<10
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K/3000K
Typical Source Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Driver Input:	AC220-240V 50/60Hz
Electrical (System W):	DC 3V 650mA 2.4W
Ambient temp:	-20 ℃ to 25 ℃
Class:	III
Material:	Fine aluminium 6063A



2.4W Ra98 3000K 21°

h(m)	E(lx)	D(m)
0.5	1287	0.19
1.0	322	0.39
1.5	143	0.58
2.0	80	0.77
2.5	51	0.96
3.0	36	1.16



2.4W Ra98 3000K 46°

h(m)	E(lx)	D(m)
0.5	72	0.43
1.0	18	0.86
1.5	8	1.29
2.0	4	1.71
2.5	3	2.41
3.0	2	2.57



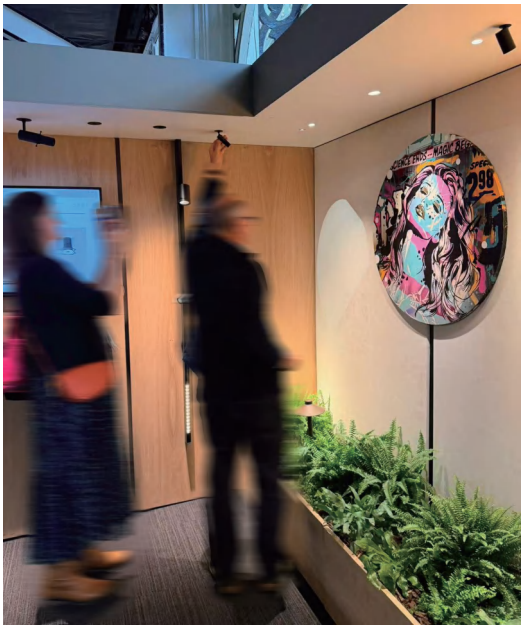

Code example:

RTC 23 2.4W -30 N F-W B
RTC/ mini-trim contour
TLC/ trimless contour

23 / 23 engine
2.4W / system power
30 / 3000K
N / non dim
F / Framing
W/ white bezel TB / trimless bezel
B/ black structure



W system	lm system	code
2.4W	58	RTC232.4W-30NF



W system	lm system	code
2.4W	58	TLC232.4W-30NF