# GLAMO CONTOUR

## Ø68
## Recessed Contour Spotlight




Adjustable Optic










**Installation Accessories**




Black Painted

| | |
|---|---|
| **IP Rating:** | IP20 |
| **Optics:** | Framing |
| **UGR:** | <10 |
| **CRI/RF/RG/R9:** | typ. 98/95/104/97 |
| **Lifetime:** | 50,000 hrs (L90 B10) |
| **CCT:** | 2700K/3000K/3500K/2700-6000K |
| **Typical Source Efficacy (lm/W):** | 113 |
| **Control:** | On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi |
| **Binning** | 2 Step MacAdams |
| **Driver Input:** | AC220-240V 50/60Hz |
| **Electrical (System W):** | DC 36V 250mA 10W |
| **Ambient temp:** | -20 ℃ to 25 ℃ |
| **Class:** | III |
| **Material:** | Fine aluminium 6063A |



**10W** Ra98 3000K 24°

| h(m) | E(lx) | D(m) |
|---|---|---|
| 0.5 | 3216 | 0.21 |
| 1.0 | 804 | 0.42 |
| 1.5 | 357 | 0.63 |
| 2.0 | 201 | 0.84 |
| 2.5 | 129 | 1.04 |
| 3.0 | 89 | 1.25 |

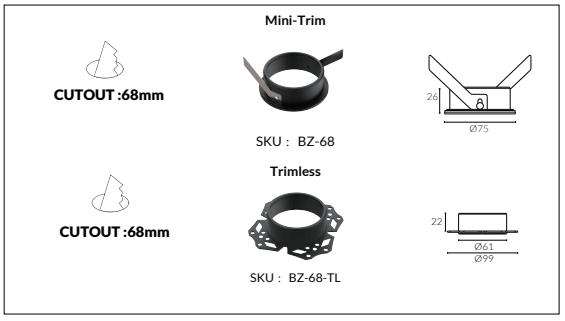




## Code example:

**RTC 68 10W -30 N F-W B**
RTC/ mini-trim contour
TLC/ trimless contour

68 / 68 engine
10W / system power
30 / 3000K
N / non dim
F / Framing
W/ white bezel TB / trimless bezel
B/ black structure

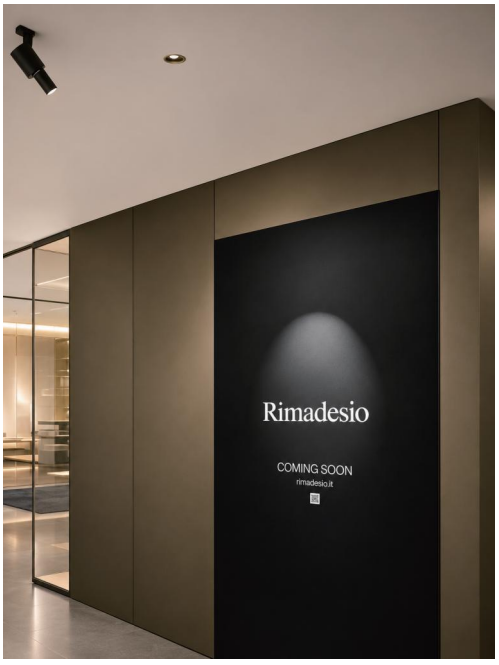


| W system | lm system | code |
|---|---|---|
| 10W | 239 | RTC6810W-30NF |




| W system | lm system | code |
|---|---|---|
| 10W | 239 | TLC6810W-30NF |