
ACME ALABASTER STRATA PENDANT

Ø57 Engine


Pendant

Fixed Optic



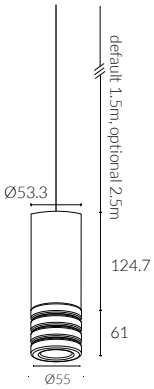

Installation Accessories

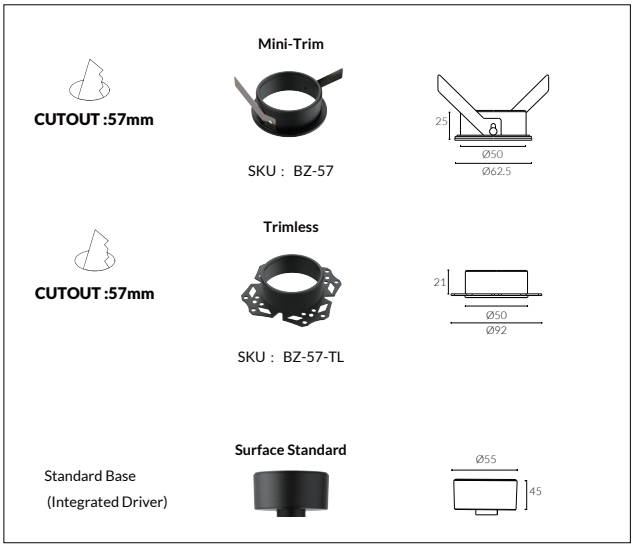

Standard

Black Painted 9005

White Painted 9016

Curated Finishes (MOQ 20 applies)

Regency Champagne

Heritage Brass

Bright Chrome

Black Nickel


IP Rating:	IP65 front
Optics:	120°
UGR:	<17
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K
Typical Source Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali
Binning	2 Step MacAdams
Driver Input:	AC220-240V 50/60Hz
Electrical (System W):	DC 36V 150mA 6W DC 36V 200mA 8W DC 36V 250mA 10W
Ambient temp:	-20 ℃ to 25 ℃
Class:	III
Material:	Fine Aluminium 6063A + Alabaster Stone



Code example:


RTP E57 10W -AS- 27 N 120-RC
RTP/ recessed pendant
TLP/ trimless pendant
STP/ surface pendant

E57 / 57 engine
10W / system power
AS / Alabaster Strata
27 / 2700K
N / non dim
120/ beam angle 120°
RC/ Regency Champagne




10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	13172	0.14
1.0	3293	0.28
1.5	1464	0.42
2.0	823	0.56
2.5	527	0.70
3.0	366	0.84



10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	7091	0.21
1.0	1773	0.43
1.5	788	0.64
2.0	443	0.86
2.5	284	1.07
3.0	197	1.29



10W Ra98 3000K 120°


h(m)	E(lx)	D(m)
0.5	52	1.20
1.0	13	2.40
1.5	6	3.60
2.0	3	4.80



W system	lm system	optics	code
10W	704	15°	RTPE5710W-AS-30N15
10W	751	24°	RTPE5710W-AS-30N24
10W	286	120°	RTPE5710W-AS-30N120



W system	lm system	optics	code
10W	704	15°	TLPE5710W-AS-30N15
10W	751	24°	TLPE5710W-AS-30N24
10W	286	120°	TLPE5710W-AS-30N120



W system	lm system	optics	code
10W	704	15°	STPE5710W-AS-30N15
10W	751	24°	STPE5710W-AS-30N24
10W	286	120°	STPE5710W-AS-30N120