ACME CURVE

Ø57 Engine I high efficiency

Trimless Adjustable Round Downlight



CUTOUT :57mm




Adjustable Optic



Accessories can be ordered separately

Light Engine



SKU：EN-57

Trimless




SKU： BZ-57-TL

Curve Baffle



SKU：BF-57-C





Standard



Black Painted 9005

White Painted 9016

Curated Finishes (MOQ 20 applies)




Regency Champagne

Heritage Brass

Bright Chrome


Black Nickel

IP Rating:	IP65 front
Optics:	15°/24°/36°
UGR:	<10
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K
Typical Source Efficacy (lm/W):	180
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Driver Input:	AC220-240V 50/60Hz
Electrical (System W):	DC 36V 250mA 10W
Ambient temp:	-20 ℃ to 25 ℃
Class:	III
Optional accessories:	Honeycomb, Elliptical Lens, Solite lens
Material:	Fine aluminium 6063A
Certifications:	CB, CE, RoHS, ERP, UKCA, GLOBAL MARK, 60-MINUTE FIRE RESISTANCE, CCC, BIS




10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	21535	0.14
1.0	5384	0.28
1.5	2393	0.43
2.0	1346	0.57
2.5	861	0.71
3.0	598	0.85



10W Ra98 3000K 24°


h(m)	E(lx)	D(m)
0.5	11891	0.21
1.0	2973	0.43
1.5	1321	0.64
2.0	743	0.85
2.5	476	1.06
3.0	330	1.28



10W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	6989	0.32
1.0	1747	0.65
1.5	777	0.97
2.0	437	1.29
2.5	280	1.61
3.0	194	1.94



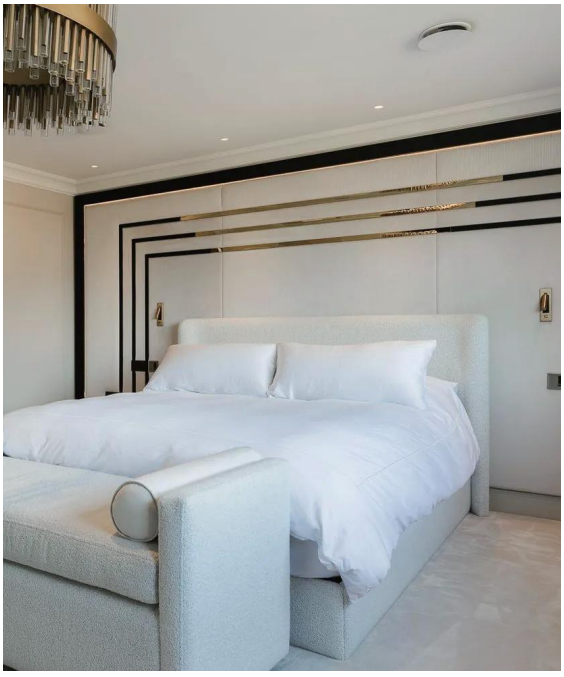


DuraGreen project:
Luxury Home in North London

Code example:

AFL 57 12W- C -TL -H 30 N 36-TB W H

AFL/ adjustable
57 / cutout 57mm
12W / system power
C / curve baffle
H / high efficiency
TL / trimless
30 / 3000K
N / non dim
36 / beam angle 36°
TB / trimless bezel
W / white baffle
H/ Honeycomb（Optional）



W system	lm system	optics	code
10W	1027	15°	AFL5710W-C-TL-H30N15
10W	1151	24°	AFL5710W-C-TL-H30N24
10W	1123	36°	AFL5710W-C-TL-H30N36