
ALABASTER GLOBE

Ø68 Engine

Mini-Trim Alabaster Globe Downlight



CUTOUT :68mm



Standard



Black Painted 9005 | White Painted 9016

Curated Finishes (MOQ 20 applies)




Regency Champagne | Heritage Brass | Bright Chrome | Black Nickel




Accessories can be ordered separately

Light Engine



SKU： EN-68

Mini-Trim




SKU： BZ-68

Alabaster Globe Diffuser



SKU： BF-68-AG


IP Rating:	IP65 front
Optics:	120°
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CCT on request:	High efficiency 3000K /2200K / WD 1800K - 3000K TW 1800K -3000K / TW 1800K - 4000K
Typical Source Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Driver Input:	AC220-240V 50/60Hz
Electrical (System W):	DC 36V 200mA 8W DC 36V 250mA 10W DC 36V 300mA 12W
Ambient temp:	-20 ℃ to 25 ℃
Class:	III
Ceiling Thickness:	9mm-28mm
Material:	Fine Aluminium 6063A + Alabaster Stone
Certifications:	CB, CE, RoHS, ERP, UKCA, GLOBAL MARK, 60-MINUTE FIRE RESISTANCE, CCC, BIS



12W Ra98 3000K 120°

h(m)	E(lx)	D(m)
0.5	59	1.24
1.0	15	2.48
1.5	7	3.72
2.0	4	4.96



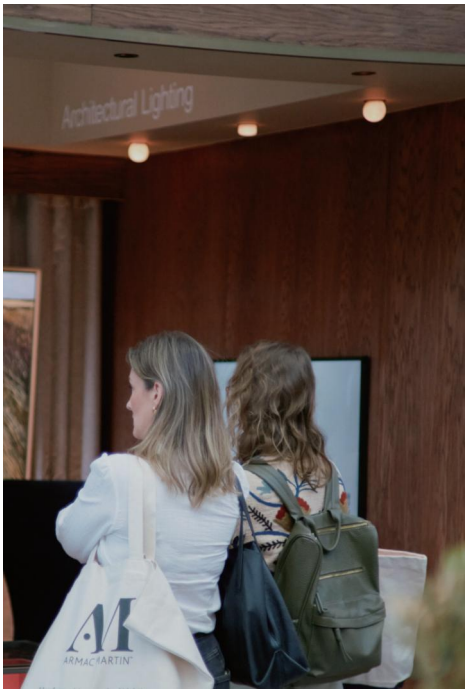

Code example:

AFL 68 12W-AG -30 N 120-B

AFL/ adjustable
68 / cutout 68mm
12W / system power
AG / Alabaster Globe
30 / 3000K
N / non dim
120 / beam angle 120°
B/ black bezel



W system	lm system	optics	code
8W	235	120°	AFL6808W-AG-30N120
10W	286	120°	AFL6810W-AG-30N120
12W	337	120°	AFL6812W-AG-30N120