BELLA SURFACE


Ø41 Engine

Surface Zoomable 20°-50° Spotlight




Adjustable Optic







Installation Accessories

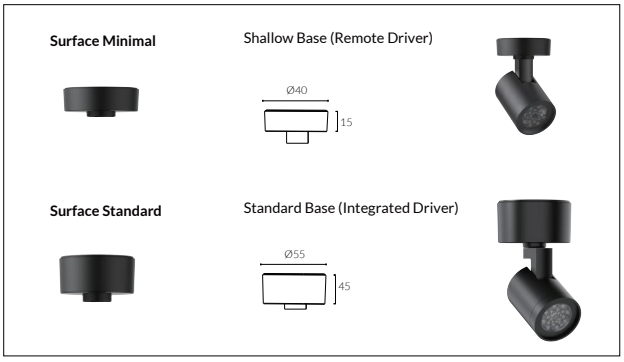


Standard




Black Painted 9005 | White Painted 9016 | Dark Brass

IP Rating:	IP20
Optics:	Zoomable 20°-50°
UGR:	<17
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K/3000K/3500K
Typical Source Efficacy (lm/W):	96
Control:	On/off, Phase Cut, 0/1-10V, Dali
Binning	2 Step MacAdams
Driver Input:	AC220-240V 50/60Hz
Electrical (System W):	DC 12V 300mA 4W
Ambient temp:	-20 ℃ to 25 ℃
Class:	III
Material:	Fine aluminium 6063A
Certifications:	CE



4W Ra92 3000K 20°

h(m)	E(lx)	D(m)
0.5	2885	0.18
1.0	721	0.35
1.5	321	0.53
2.0	180	0.71
2.5	115	0.88
3.0	80	1.06



4W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	675	0.44
1.0	169	0.87
1.5	75	1.31
2.0	42	1.75
2.5	27	2.18
3.0	19	2.62





DuraGreen project:
The Collective, Sydney

Code example:

STM 41 04W (/SB) -30 N 2050- B
STM/ BELLA surface
41 / 41 engine
04W / system power
SB/ Standard Base
30 / 3000K
N / non dim
2050 / zoomable 20°-50°
B/ black structure



W system	lm system	optics	code
4W	330-333	20°- 50°	STM4104W-30N2050



W system	lm system	optics	code
4W	330-333	20°- 50°	STM4104W/SB-30N2050