
CAELIA ALABASTER GLOBE PENDANT

Ø60

Surface Pendant



Fixed Optic

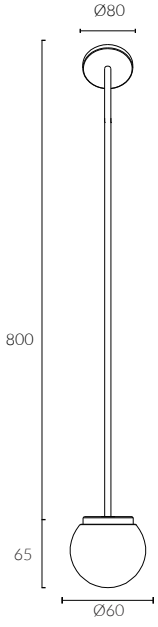



Remote Driver


IP Rating:	IP20
Optics:	120°
UGR:	<17
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K
Typical Source Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali
Binning	2 Step MacAdams
Driver Input:	AC220-240V 50/60Hz
Electrical (System W):	DC 3V 600mA 2.5W
Ambient temp:	-20 ℃ to 25 ℃
Class:	III
Material:	Fine Aluminium 6063A + Alabaster Stone





Code example:

STP CA 60 2.5W -AG- 30 N 120
STP/ surface pendant
CA/ CAELIA ALABASTER
60 / 60 diffuser diameter
2.5W / system power
AG / Alabaster Globe
30 / 3000K
N / non dim
120/ beam angle 120°



W system	lm system	optics	code
2.5W	91	120°	STPCA602.5W-AG-30N120