

CAELIA ALABASTER LUNA 48V

Φ54


48V Surface Downlight



minimal track



standard track

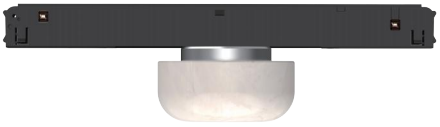




Regency
Champagne

IP Rating:	IP20
Optics:	120°
UGR:	<10
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K（3000K on request)
Typical Source Efficacy (lm/W):	110
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 3V 600mA 2.5W
Ambient temp:	-20 ℃ to 25 ℃
Class:	III
Material:	Fine Aluminium 6063A + Alabaster Stone



Code example:

MSC 54 2.5W-AL -30 N 120-RC
MSC/ 48V mini-line surface CAELIA
54/ 54 diffuser diameter
2.5W / system power
AL / Alabaster Luna
30 / 3000K
N / non dim
120 / beam angle 120°
RC/ Regency Champagne



W system	lm system	optics	code
2.5W	73	120°	MSC542.5W-AL-30N120