
# CAELIA ALABASTER STRATA PENDANT

## Ø55

### Surface Pendant



Fixed Optic

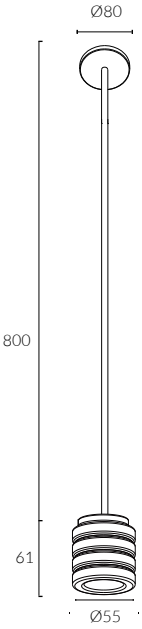




Remote Driver

| | |
|---|---|
| **IP Rating:** | IP20 |
| **Optics:** | 120° |
| **UGR:** | <17 |
| **CRI:** | 92Ra |
| **Lifetime:** | 50,000 hrs (L90 B10) |
| **CCT:** | 2700K / 3000K |
| **Typical Source Efficacy (lm/W):** | 110 |
| **Control:** | On/off, Phase Cut, 0/1-10V, Dali |
| **Binning** | 2 Step MacAdams |
| **Driver Input:** | AC220-240V 50/60Hz |
| **Electrical (System W):** | DC 3V 600mA 2.5W |
| **Ambient temp:** | -20 ℃ to 25 ℃ |
| **Class:** | III |
| **Material:** | Fine Aluminium 6063A + Alabaster Stone |



## Code example:

**STP CA 55 2.5W -AS- 30 N 120**
**STP**/ surface pendant
**CA**/ CAELIA ALABASTER
**54** / 54 diffuser diameter
**2.5W** / system power
**AS** / Alabaster Strata
**30** / 3000K
**N** / non dim
**120**/ beam angle 120°



| W system | lm system | optics | code |
|---|---|---|---|
| 2.5W | 41 | 120° | STPCA552.5W-AS-30N120 |