
CAELIA ALABASTER WALL

Ø60

Alabaster Globe Short Arm Wall Light



Fixed Optic

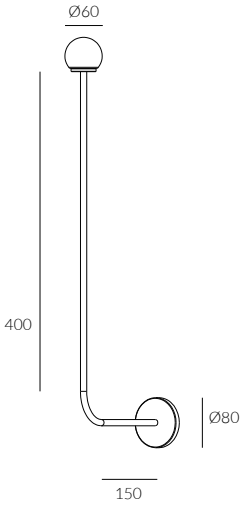



Black Painted

Accessories not included



24V DC–DC Constant-Current Driver
Designed to connect DuraGreen constant-current luminaires with a **3–18V forward-voltage range** to a **24V DC constant-voltage supply**. Available in 350mA, 500mA and 700mA versions.


IP Rating:	IP65
Optics:	120°
UGR:	<10
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K（3000K on request)
Typical Source Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning:	2 Step MacAdams
Output:	DC 3V 600mA 2.5W
Ambient temp:	-20 ℃ to 25 ℃
Class :	III
Material:	Fine Aluminium 6063A + Alabaster Stone



Code example:


CASWL 60 2.5W - AG- 27 N 120- (24)-B

CA/ CAELIA ALABASTER
SWL/ short arm wall light
60 / 60 diameter
2.5W / system power
AG/ Alabaster Globe
27 / 2700K
N / non dim
120/ beam angle 120°
24 / 24VDC
B/ Black



24VDC Verison

W system	Voltage	lm system	optics	code
2.5W	24VDC	91	120°	CASWL602.5W-AG-30N120-24



Constant Current Version

W system	lm system	optics	code
2.5W	91	120°	CASWL602.5W-AG-30N120