
EVOLINE PENDANT


67X64
Square Pendant

Fixed Optic



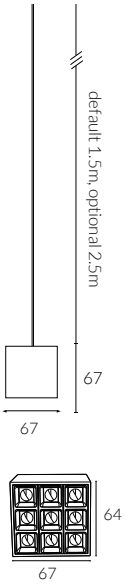

Installation Accessories

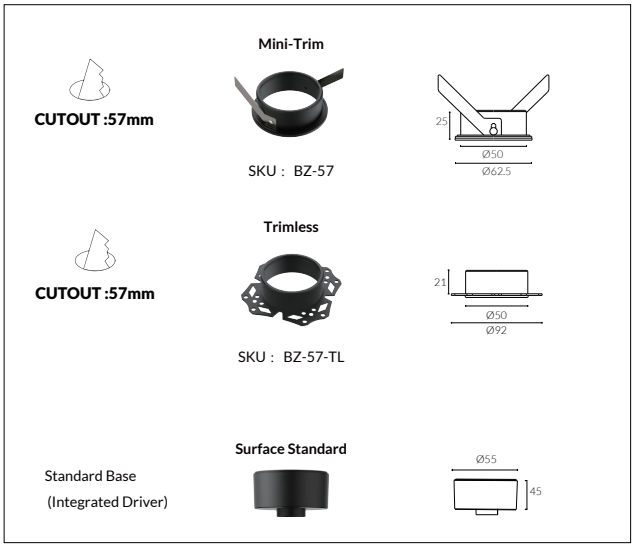


Standard

Black Painted

White Painted


IP Rating:	IP20
Optics:	50°
UGR:	<17
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	3000K/3500K
Typical Source Efficacy (lm/W):	113
Control:	On/off, Phase Cut, 0/1-10V, Dali
Binning	2 Step MacAdams
Driver Input:	AC220-240V 50/60Hz
Electrical (System W):	DC 27V 300mA 8W
Ambient temp:	-20 ℃ to 25 ℃
Class:	III
Material:	Fine aluminium 6063A



8W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	907	0.48
1.0	227	0.96
1.5	101	1.44
2.0	57	1.93
2.5	36	2.41
3.0	25	2.89




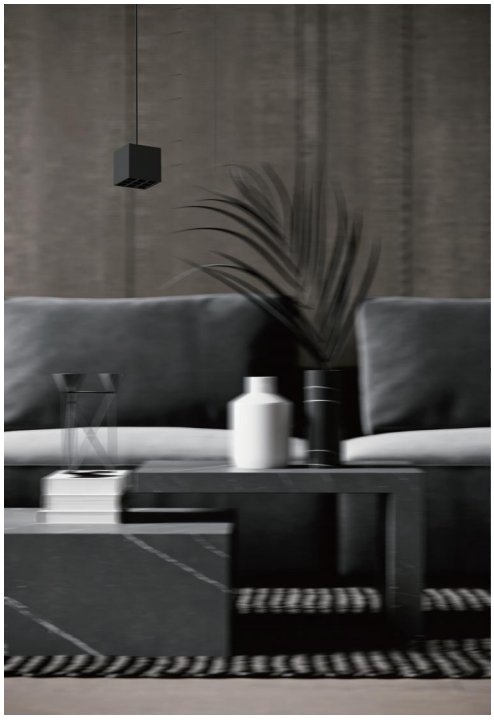


Code example:

RTP Q 09 08W - 30 N 50-B
RTP/ recessed pendant
TLP/ trimless pendant
STP/ surface pendant


Q / square
09 / 9 spots
08W / system power
30 / 3000K
N / non dim
50/ beam angle 50°
B/ black structure



W system	lm system	optics	code
8W	458	50°	RTPQ0908W-30N50



W system	lm system	optics	code
8W	458	50°	TLPQ0908W-30N50



W system	lm system	optics	code
8W	458	50°	STPQ0908W-30N50