ACME WALL-WASHER

Ø68 Engine

Mini-Trim Wall Wash Downlight



CUTOUT :68mm



Wall Wash Optic



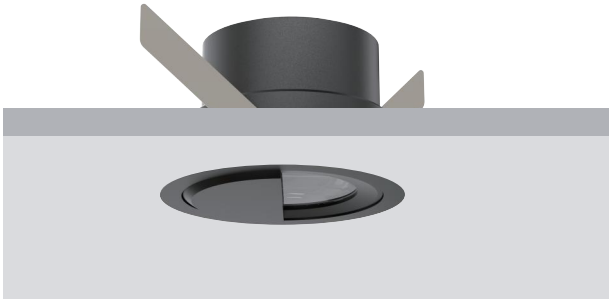

Standard



Black Painted 9005

White Painted 9016



X = distance to wall
= ceiling height ÷ 3

IP Rating:	IP65 front
Optics:	Asymmetrical Wallwash
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CCT on request:	High efficiency 3000K /2200K / WD 1800K - 3000K TW 1800K -3000K / TW 1800K - 4000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Driver Input:	AC220-240V 50/60Hz
Electrical (System W):	DC 36V 350mA 15W
Ambient temp:	-20 ℃ to 25 ℃
Class:	III
Ceiling Thickness:	9mm-28mm
Material:	Fine aluminium 6063A
Certifications:	CB, CE, RoHS, ERP, UKCA, GLOBAL MARK, CCC, BIS



15W Ra98 3000K
Asymmetrical

h(m)	E(lx)	D(m)
0.5	50	0.82
1.0	12	1.64
1.5	6	2.46
2.0	3	3.27
2.5	2	4.09
3.0	1	4.91



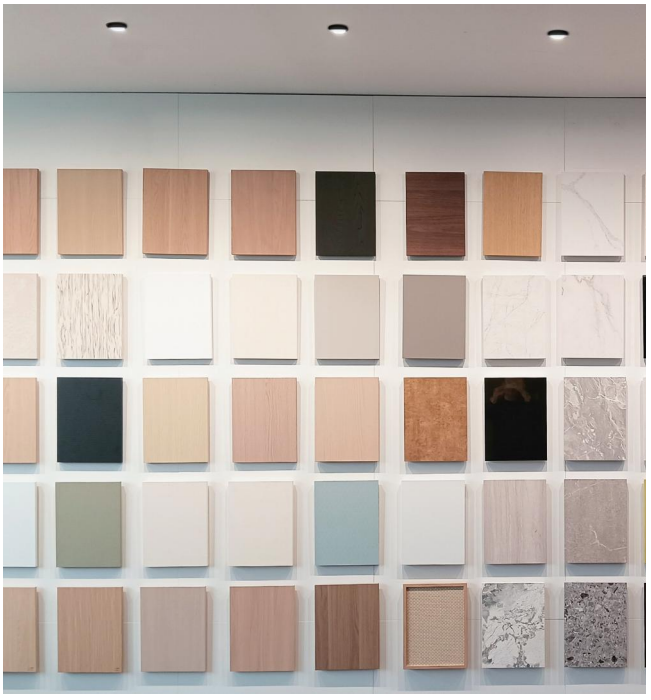

Code example:

MFL 68 15W-30 N WS-B B
MFL/ Fixed
68 / cutout 68mm
15W / system power
30 / 3000K
N / non dim
WS / Wallwash
B/ black bezel
B/ black baffle



W system	lm system	optics	code
15W	448	Asymmetrical Wallwash	MFL6815W-30NWS