FOCUS

Ø32
Outdoor Floor Washer




cutout :32mm



Fixed Optic






Accessories not included



24V DC–DC Constant-Current Driver
Designed to connect DuraGreen constant-current luminaires with a **3–18V forward-voltage range** to a **24V DC constant-voltage supply**. Available in 350mA, 500mA and 700mA versions.

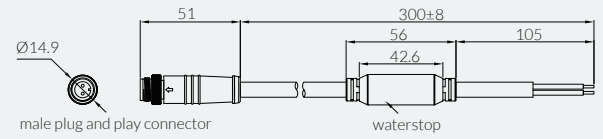

Bezel



Black Painted



Solid Brass



Bespoke

IP Rating:	IP67
Optics:	Asymmetric
UGR:	<19
CRI:	92Ra
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K （3000K on request)
Typical Source Efficacy (lm/W):	113
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Output:	DC 3V 600mA 2.5W
Ambient temp:	-20 ℃ to 45 ℃
Class:	III
Plug Type:	Plug & Play (2 pin) - male
Certifications:	CE

Illuminate your garden with our solid brass spotlight, designed to age gracefully as it develops a rich patina that reflects the passage of time.



Code example:

UL 32 2.5W- 27 N WW- (24)-SB
UL/ uplight
32 / cutout 32mm
2.5W / system power
GS / glare shield
27 / 2700K
N / non dim
WW / wall wash
24 / 24VDC
SB/ solid brass

Illuminate your garden with our solid brass spotlight, designed to age gracefully as it develops a rich patina that reflects the passage of time.

24VDC Verison



W system	Voltage	lm system	optics	code
2.5W	24VDC	104	Asymmetric	UL322.5W-27NWW-24

Constant Current Version



W system	lm system	optics	code
2.5W	104	Asymmetric	UL322.5W-27NWW