


ACME SEMI

Φ57 Engine Semi-recessed Trimless Adjustable Round Downlight




cutout:57mm

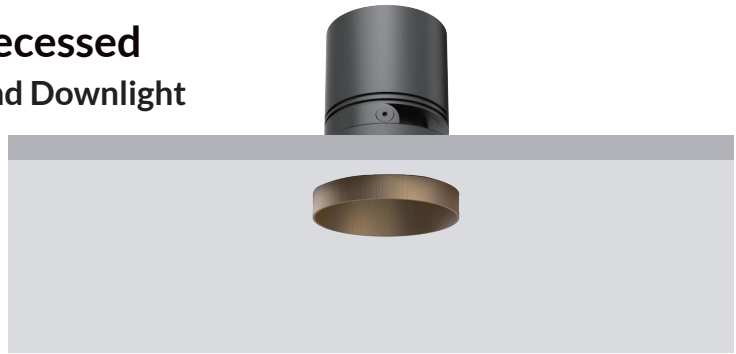

Adjustable Optic



360°

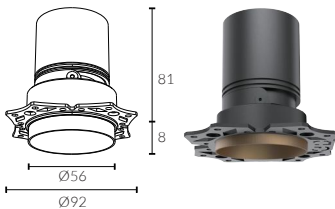

Standard



Black Painted
9005

White Painted
9016

Curated Finishes (MOQ 20 applies)



Polished Brass

Black Nickel

Bright Chrome

Rose Gold

Solid Brass

Peach Fuzz

Antique Copper

Aged Bronze

Antique Brass

Dark Brass

Brushed Grey

Pearl Nickel

IP Rating:	Front IP44, optional IP65
Optics:	15°/24°/36°/50°
UGR:	<10
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K 1800-3000K(Warm Dim), 2700K - 6000K (Tunable White)


Typical Source	110
Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 150mA 6W DC 36V 200mA 8W DC 36V 250mA 10W

Ambient temp:	-20 °C to 45 °C
Class:	II
Optional accessories:	Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter
Material:	Fine aluminium 6063A
Fire resistance test:	60 minutes




10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	13172	0.14
1.0	3293	0.28
1.5	1464	0.42
2.0	823	0.56
2.5	527	0.70
3.0	366	0.84




10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	7091	0.21
1.0	1773	0.43
1.5	788	0.64
2.0	443	0.86
2.5	284	1.07
3.0	197	1.29





10W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	3820	0.31
1.0	955	0.63
1.5	424	0.94
2.0	239	1.25
2.5	153	1.57
3.0	106	1.88




10W Ra98 3000K 50°


h(m)	E(lx)	D(m)
0.5	1678	0.50
1.0	420	1.01
1.5	186	1.51
2.0	105	2.01
2.5	67	2.51
3.0	47	3.02

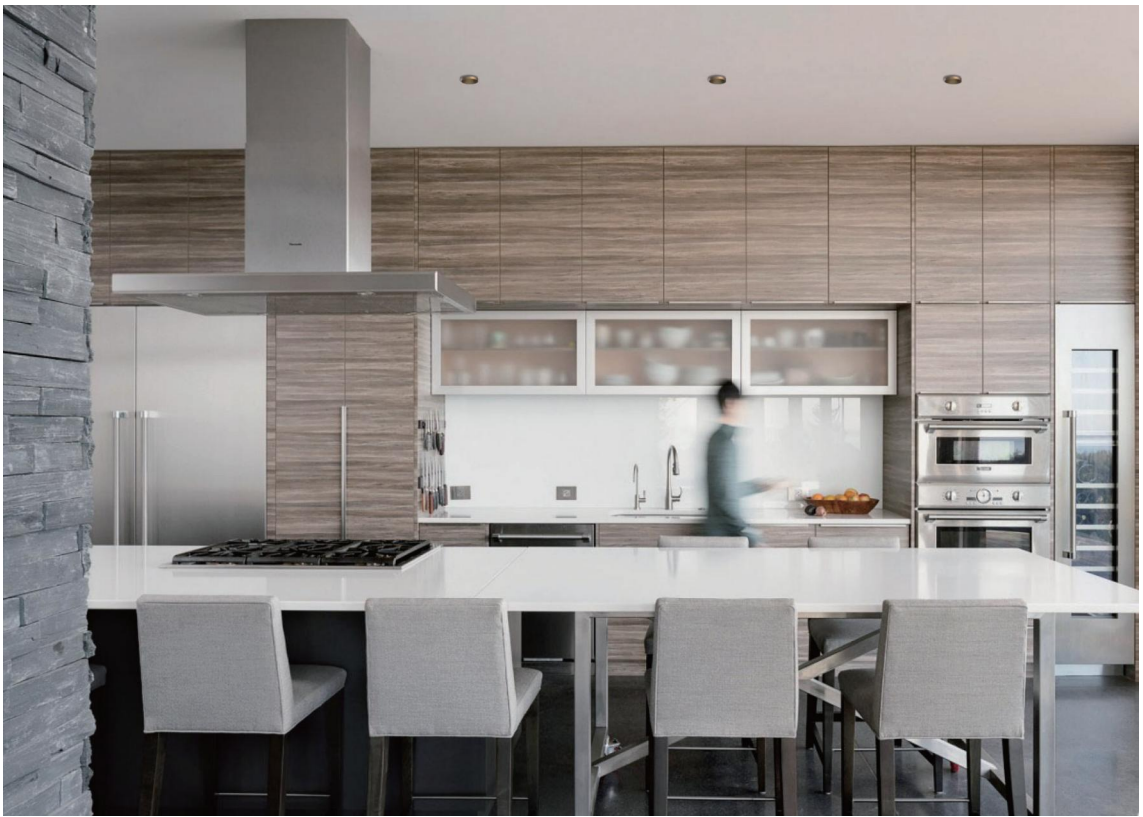

W system	lm system	optics	code
6W	450	15°	AFL5706W-M-TL-30N15
6W	532	24°	AFL5706W-M-TL-30N24
6W	523	36°	AFL5706W-M-TL-30N36
6W	464	50°	AFL5706W-M-TL-30N50



W system	lm system	optics	code
8W	582	15°	AFL5708W-M-TL-30N15
8W	624	24°	AFL5708W-M-TL-30N24
8W	661	36°	AFL5708W-M-TL-30N36
8W	600	50°	AFL5708W-M-TL-30N50



W system	lm system	optics	code
10W	704	15°	AFL5710W-M-TL-30N15
10W	751	24°	AFL5710W-M-TL-30N24
10W	814	36°	AFL5710W-M-TL-30N36
10W	723	50°	AFL5710W-M-TL-30N50