




ORBIT 48V


Φ55 48V Pendant



default 1.5m, optional 2.5m

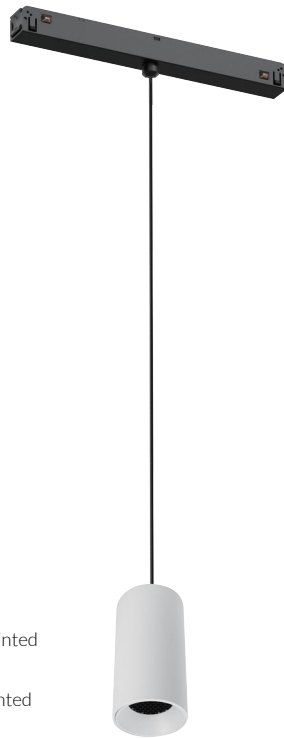


IP Rating:	IP20
Optics:	12°/24°/36°/45°
UGR:	< 10
CRI:	98Ra
Lifetime:	> 50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K/5000K/ 2000K-3000K/1800K-4000K/2700K-6000K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 250mA 10W DC 36V 300mA 12W DC 36V 350mA 15W
Ambient temp:	-20 C to 45 C
Class:	III




15W Ra98 3000K 12°

h(m)	E(lx)	D(m)
0.5	21010	0.10
1.0	5253	0.20
1.5	2334	0.30
2.0	1313	0.41
2.5	840	0.51
3.0	584	0.61




15W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	13292	0.19
1.0	3323	0.38
1.5	1477	0.57
2.0	831	0.76
2.5	532	0.95
3.0	369	1.14




15W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	6461	0.32
1.0	1615	0.63
1.5	718	0.95
2.0	404	1.26
2.5	258	1.58
3.0	179	1.89



15W Ra98 3000K 45°

h(m)	E(lx)	D(m)
0.5	2342	0.42
1.0	585	0.84
1.5	260	1.25
2.0	146	1.67
2.5	94	2.09
3.0	65	2.51



W system	lm system	optics	code
-----------------	------------------	---------------	-------------

15W	660	12°	M22P5515W-30N12-B
15W	1012	24°	M22P5515W-30N24-B
15W	1038	36°	M22P5515W-30N36-B
15W	953	45°	M22P5515W-30N45-B