

MOOD DOWNLIGHT


Φ75 Fixed Round Wall Wash



cutout : 75mm



Wall Wash optic

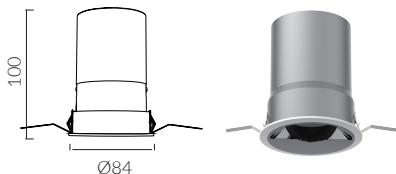

baffle



Black Matt



White Matt




Silver Specular

Recessed round wall-washer luminaire designed for creating a vertical downward beam of light

IP Rating:	IP20 and IP44 options
Optics:	Wall Wash
UGR:	<17
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K/5000K/ 2000K-3000K/1800K-4000K/2700K-6000K


Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning:	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 200mA 8W DC 36V 250mA 10W DC 36V 300mA 12W

Ambient temp:	-20 °C to 45 °C
Class:	II



12W Ra98 3000K
Asymmetrical

h(m)	E lx	D(m)
0.5	1272	0.40
1.0	318	0.80
1.5	141	1.21
2.0	80	1.61
2.5	51	2.01
3.0	35	2.41



X = distance to wall
= ceiling height ÷ 5.5



DuraGreen project:
Luxury Apartment



W system	lm system	optics	code
8W	406	Wall Wash	MF7508W-30NWS-W



W system	lm system	optics	code
10W	516	Wall Wash	MF7510W-30NWS-W



W system	lm system	optics	code
12W	590	Wall Wash	MF7512W-30NWS-W