



MOOD SQUARE WALL-WASHER

Ø 60*60

Mini-Trim Square Wall Wash Downlight



Wall Wash optic

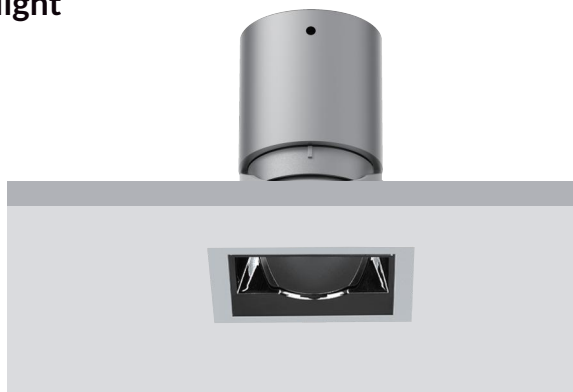

bezel



Black



White

baffle



Black Matt




White Matt



Silver Specular


Recessed round wall-washer luminaire designed for creating a vertical downward beam of light

IP Rating:	IP20 and IP44 options
Optics:	Wall Wash
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K / 3000K / 3500K / 4000K / 2700K-6000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 250mA 10W
Ambient temp:	-20 °C to 25 °C
Class:	III
Optional accessories:	Honeycomb, Elliptical Lens, Solite lens
Material:	Fine aluminium 6063A
Certifications:	CB, CE, RoHS, UKCA, GLOBAL MARK, CCC




10W Ra98 3000K
Asymmetrical

h(m)	E(lx)	D(m)
0.5	1338	0.37
1.0	335	0.74
1.5	149	1.12
2.0	84	1.49
2.5	54	1.86
3.0	34	2.23



X = distance to wall
= ceiling height ÷ 5.5



Code example:

AFQ 60 10W-30 N WS-W B

AFQ/ adjustable square

60 / cutout 60°60mm

08W / system power

30 / 3000K

N / non dim

WS / wall wash

W/ white bezel

B/ black baffle



W system	lm system	optics	code
10W	442	Wall Wash	AFQ6010W-30NWS